SAGITTARIUS

TAPS & SHOWERING

Construction Brass Body, Zinc-alloy Handles

Finishes Chrome plated Product Type Contemporary

Water Pressure Min. 0.2 bar, Max. 6.0 bar

Tested Between

Standards Complies with BS5412, BS EN200
Certification WRAS (1709044) approved and certi-

fied

Cartridge 1/4 Turn 3/4" Ceramic disc valves

Aerator Neoperl spout aerator Fitting Brass G3/4" BSP tails


Guarantee 10 years against manufacturing faults


(excluding serviceable parts which come with a Three year warranty)

AXIS BATH FILLER

AX/104



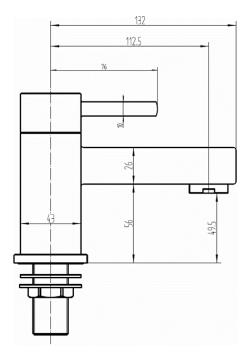

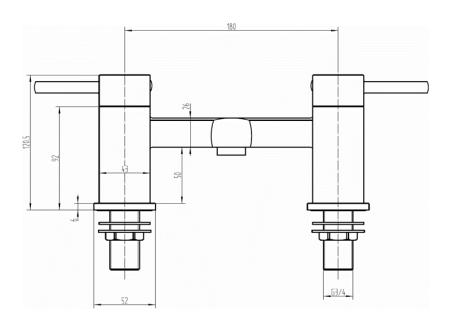


The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
	6.7	8.9	-	15.2	25.2	-	33.2	42.0	-	-

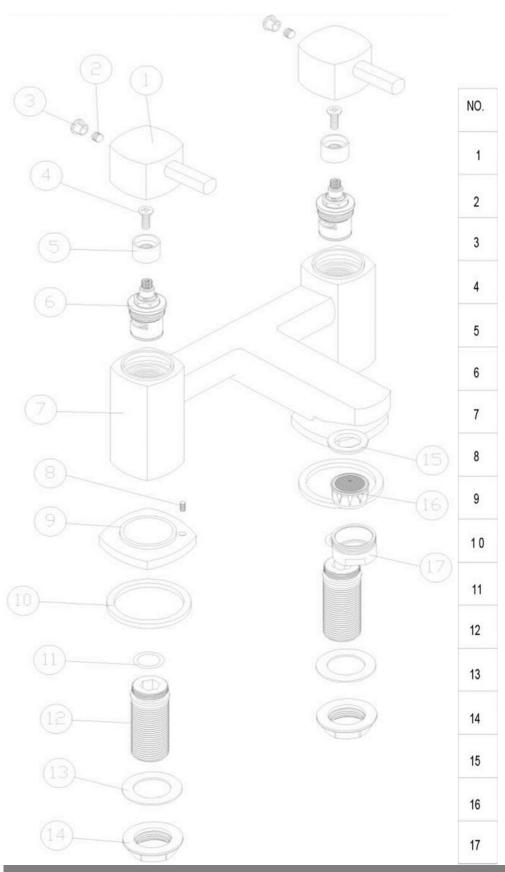

Bath Filler

DESCRIPTION	QTY
HANDLE	2
SCREW	2
HANDLE COVER	2
SCREW	2
PVC CORE	2
COLD CARTRIDGE HOT CARTRIDGE	1 PAIR
TAP BODY	1
SCREW	2
BASE PLATE	2
WASHER	2
"O" RING	2
G3/4" BSP Tails	2
WASHER	2
BACK NUT	2
WASHER	1
NEOPERL AERATOR	1
NOZZLE	1