## **TAPS & SHOWERING**

**MIXER** 

**BA/106** 

BARI MONOBLOC BASIN

Brass Body, Zinc-alloy handle Construction

**Finishes** Chrome (Ni: 8-12um, Cr: 0.25-0.3um)

**Product Type** Contemporary

**Water Pressure** Min. 0.2 bar, Max. 6.0 bar

**Tested Between** 

**Standards** Complies with BS6920, BS EN200 Certification WRAS (1710044) approved and certi-

fied, manufactured to comply with ACS

CeramTec Triduon® Thermostatic Ce-Cartridge

ramic disk cartridge

**Aerator** Neoperl spout aerator

**Fitting** UK: M10 x 350mm G½" BSP Female

Flexi Tails

EU: M10 x 350mm G3/8" BSP Female

Flexi Tails

10 years against manufacturing faults Guarantee

(excluding serviceable parts)

Supplied with G1¼" sprung waste(UK **Additional Infor-**

only); Triduon® Volume Limiter

(Optional)

## **Operating Water Pressures**




mation



**COMBI BOILER** 






The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

## Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
	2.0	3.8	-	5.8	9.5	1	13.9	15.6	1	-

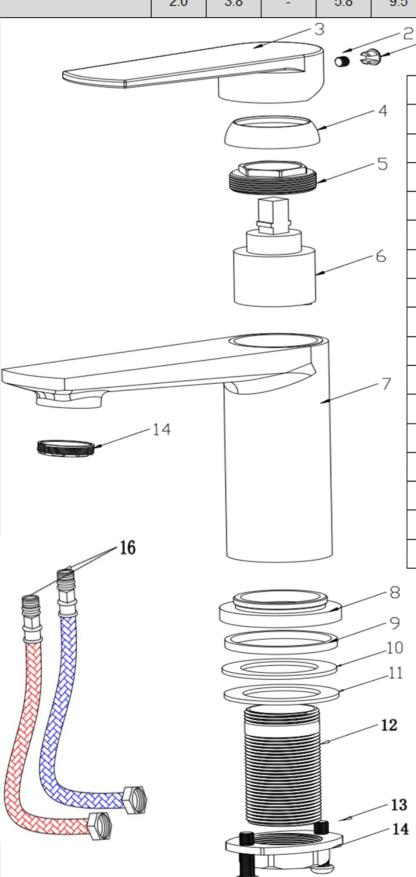

16	FLEXI TAIL	2
15	AERATOR	1
14	SCREW	1
13	BACK NUT	1
12	BSP TAIL	1
11	WASHER	1
10	WASHER	1
9	RUBBER GASKET	1
8	BASE PLATE	1
7	TAP BODY	1
6	CARTRIDGE	1
5	LOCK NUT	1
4	COVER	1
3	HANDLE	1
2	SCREW	1
1	COVER CAP	1
No.	DESCRIPTION	QTY

FOR FURTHER ADVICE PLEASE CONTACT:-