SAGITTARIUS

Construction alloy handle

Finishes

Product Type

Water Pressure

Tested Between

Standards

Cartridge

Fitting

Guarantee

Additional Information

Brass Body (CuZn40Pb18); Zinc

Chrome plated to BS EN 248 Contemporary Min. 0.5 bar, Max. 6.0 bar

Complies with BS5412, BS EN200 1/4 Turn 1/2" Ceramic Disc Valves G1/2" BSP Flexible inlet hoses 10 years against manufacturing faults (excluding serviceable Parts)

Brass spray head, Nylon braided kink-resistant hose; 360° Swivel spout

TAPS & SHOWERING


BOSTON PROFESSIONAL TWIN LEVER SINK MIXER CHROME BO/282/C



The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

FOR FURTHER ADVICE PLEASE CONTACT :-

SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029 EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK

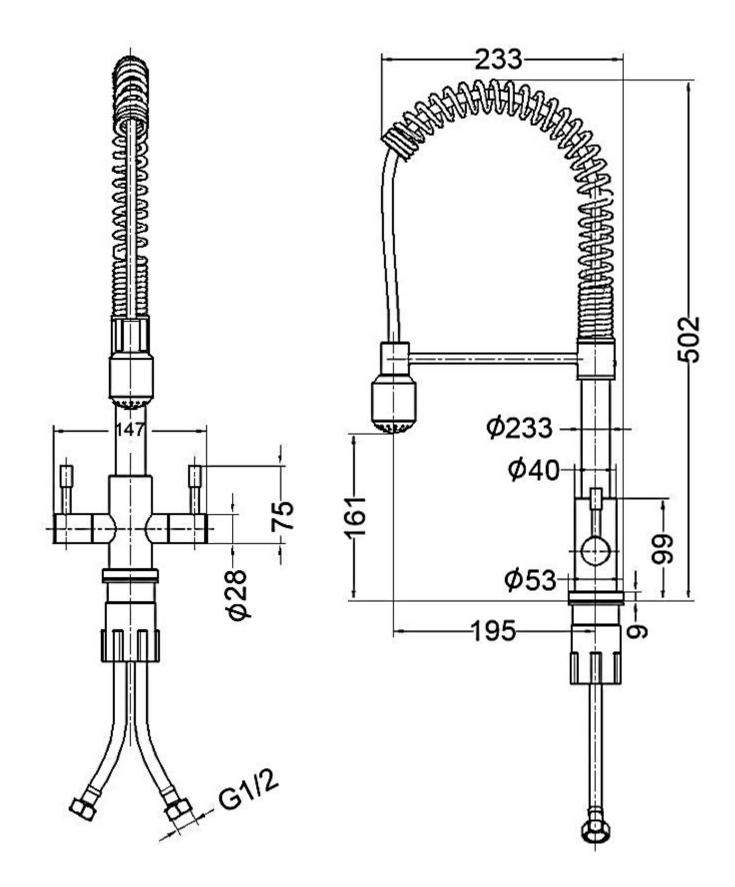

Flow Rates (Litres per minute)

riow Rates (Lines per minute)										
System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
	-	4.0	-	6.8	9.5	-	14.0	17.0	-	-

FOR FURTHER ADVICE PLEASE CONTACT :-

SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029 EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK

