TAPS & SHOWERING

Construction

Product Type

Water Pressure Tested Be-

Finishes

tween

Standards

Cartridge

Fitting

Aerator

Guarantee

Brass Body (CuZn40Pb18); Zinc-

alloy Handles

Chrome plated to BS

EN 248

Contemporary

Min. 0.2 bar, Max. 6.0

bar

Complies with BS5412,

BS EN200

1/4 Turn 1/2" Ceramic

Disc Valves

10mm G1/2" BSP Flex-

ible inlet connection

hoses

Spout aerator

10 years against manu-

facturing faults

(excluding serviceable

parts)

CONTRACT BASIN TAPS CO/102/C




Water pressure







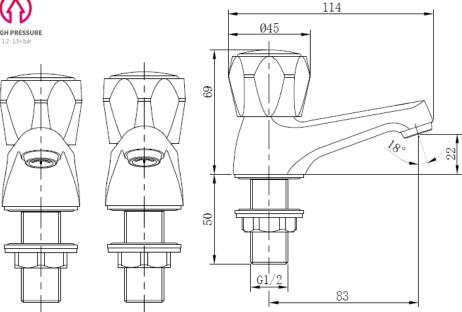

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

