SAGITTARIUS

TAPS & SHOWERING

Mixer

EL/106/BB

ERGO Mono Bloc Basin

Construction Brass Body, Zinc-alloy Handle

Finishes Brushed Brass

Product Type Contemporary

Water Pressure Tested Min. 0.2 bar, Max. 6.0 bar

Standards Complies with BS6920, BS EN200

Cartridge CITEC 35mm 110° Turn Cold Start Ce-

Aerator Neoperl Slim Aerator

Fitting UK: M10 x 350mm G½" BSP Female

Flexi Tails

EU: M10 x 350mm G3/8" BSP Female

Guarantee 10 years against manufacturing faults

Additional Information Supplied with G1¼" sprung waste (UK

only)

Operating Water Pressure




LOW PRESSURE



COMBI BOILER






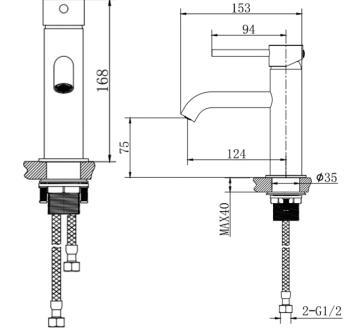

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications with-

Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
	-	-	-	4.6	6.0	-	8.3	10.2	-	-

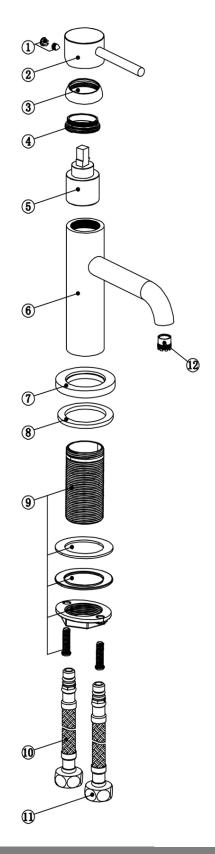

NO.	ITEM	QTY		
1	GRUB SCREW & COVER CAP	1		
2	ZINC-ALLOY HANDLE	1		
3	HANDLE COLLAR	1		
4	BRASS CARTRIDGE NUT	1		
5	35MM CITEC COLD-START	1		
	CERAMIC DISC CARTRIDGE			
6	BRASS TAP BODY	1		
7	BASE PLATE	1		
8	BASE PLATE WASHER	1		
9	BRASS TAP FIXING SET	1		
10	G1/2" BSP FLEXI-TAIL (HOT)	1		
11	G1/2" BSP FLEXI-TAIL (COLD)	1		
12	AERATOR	1		