SAGITTARIUS

TAPS & SHOWERING

Construction Brass Body CuZn40Pb2, EN CW617N (equivalent to BS CZ122)

Finishes Chrome plated to BS EN 248

Product Type Contemporary

 Water Pressure
 Min. 0.2 bar, Max. 6.0 bar

 Plumbing Systems
 Suitable for all plumbing systems

 Standards
 Complies with BS5412, BS EN200

 Certification
 Manufactured to comply with WRAS

 Cartridge
 35mm Coolstart ceramic disc cartridge

Aerator Neoperl Adjustable Slim Air


Fitting M10 x 350mm $\frac{1}{2}$ " BSP Female Flexi Tails Packaging 54 x 36 x 19cm / carton (8 boxes / carton)

Guarantee 10 years against manufacturing faults (excluding serviceable parts).

Additional Information Supplied with G 11/4" sprung waste

ERGO LEVER MONO EXT BASIN MIXER CHROME EL/109/C



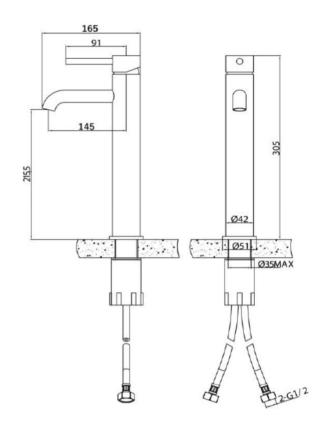

Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
EL109	3.8	6.8	-	9.1	12.3	-	14.7	17.3	-	-

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice