TAPS & SHOWERING

Construction Brass Body, Zinc-alloy Handles

Finishes Chrome (Ni: 8-12um, Cr: 0.25-0.3um)

Product Type Contemporary

Water Pressure Min. 0.2 bar, Max. 6.0 bar

Tested Between

Standards Complies with BS5412, BS EN200

¼ turn ¾" Ceramic disc valves Cartridge

Aerator Neoperl spout aerator

Brass 1/2" BSP tails (hot and cold) **Fitting**

Guarantee 10 years against manufacturing faults

(excluding serviceable parts)


Operating Water Pressure









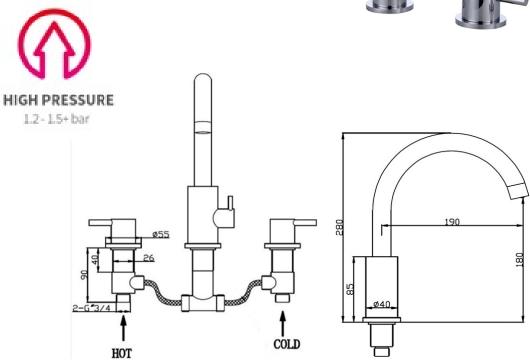

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Ba	r 3.0 Bar	4.0 Bar	5.0 Bar
	1	4.7	-	6.9	10.2	-	14.9	17.6	-	-
		11	11 THREAD BAR		? :	1 :	22	FLEX	I	2

11	THREAD BAR	1	22	FLEXI	2
10	O-RING	1	21	HANDLE	2
9	BODY	2	20	GRUB	2
8	GRUB	2	19	SHROUD	2
7	O-RING	2	18	CARTRIDGE	2
6	WASHER	1	17	BASE PLATE	3
5	CONNECTOR	2	16	WASHER	3
4	NOZZLE	1	15	WASHER	3
3	AERATOR	1	14	NUT	3
2	WASHER	1	13	FITTING BAR	2
1	SPOUT	1	12	CONNECTOR	1
No	DESCRIPTION	OTV	No	DESCRIPTION	OTV

