SAGITTARIUS

TAPS & SHOWERING

 Construction
 Brass Body (CuZn40Pb18)

 Finishes
 Chrome plated to BS EN 248

Product Type Contemporary

Water Pressure
Plumbing Systems
Standards
Certification
Cartridge

Min. 0.2 bar, Max. 6.0 bar
Suitable for all plumbing systems
Complies with BS5412, BS EN200
Manufactured to comply with WRAS

Aerator Non concussive valve

Fitting Laminar
Packaging 1/2" BSP tail

Guarantee 30x20.5x30cm / carton (10 boxes / carton); 18x14x5.5cm inner box. 1 years against manufacturing faults (excluding serviceable parts).


Suitable for cold or premixed single water feed

ERGO NON CONCUSSIVE

BASIN TAPS CHROME

EL/148/C



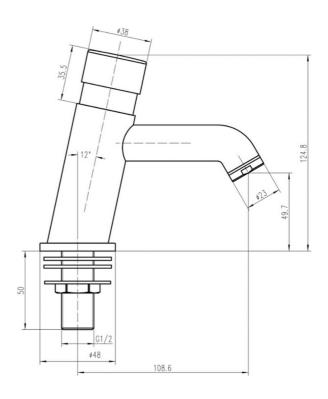


Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
EL/148/C	-	2.7	-	3.0	4.5	-	6.3	8.5	-	-

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

Exploded diagram EL/148/C

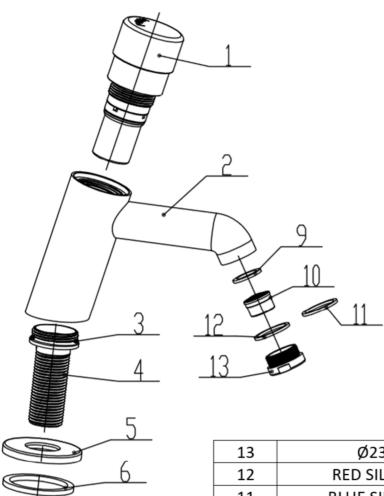

13	Ø23 OUTLET	1
12	RED SILICONE RING	1
11	BLUE SILICONE RING	1
10	M20 x 1 AERATOR	1
9	WASHER	1
8	PLASTIC HEXAGONAL NUT	1
7	Ø43*Ø21*2 WAHSER	2
6	Ø42*Ø35.5*3 WASHER	1
5	Ø45*5 FLANGE	1
4	G <u>½</u> " INLET PIPE	1
3	Ø27*Ø2 O-RING	1
2	G <u>½</u> " TAP BODY	1
1	TIME ADJUSTABLE CARTRIDGE	1
No.	DESCRIPTION	QTY

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice