SAGITTARIUS

TAPS & SHOWERING

Construction Brass Body CuZn40Pb2, EN CW617N (equivalent to BS CZ122)

Zinc alloy Handle

Finishes Chrome: Ni: 8-12um, Cr: 0.25-0.3um

Product Type Contemporary

Water Pressure Min. 0.2 bar, Max. 6.0 bar
Plumbing Systems Suitable for all plumbing systems
Standards Complies with BS5412, BS EN200

Certification -

Cartridge 1/4 turn 3/4" ceramic disc valve

DiverterCeramic discAeratorNeoperl AeratorFitting%" BSP


Packaging

Guarantee 10 years against manufacturing faults (excluding serviceable parts).

Additional Information

ERGO LEVER DECK MOUNTED
SIDE VALVES CHROME
EL/187/C






Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
EL/187/C	11.7	14.9	17.7	22.1	30.4	36.8	42.2	51.3	58.5	-

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

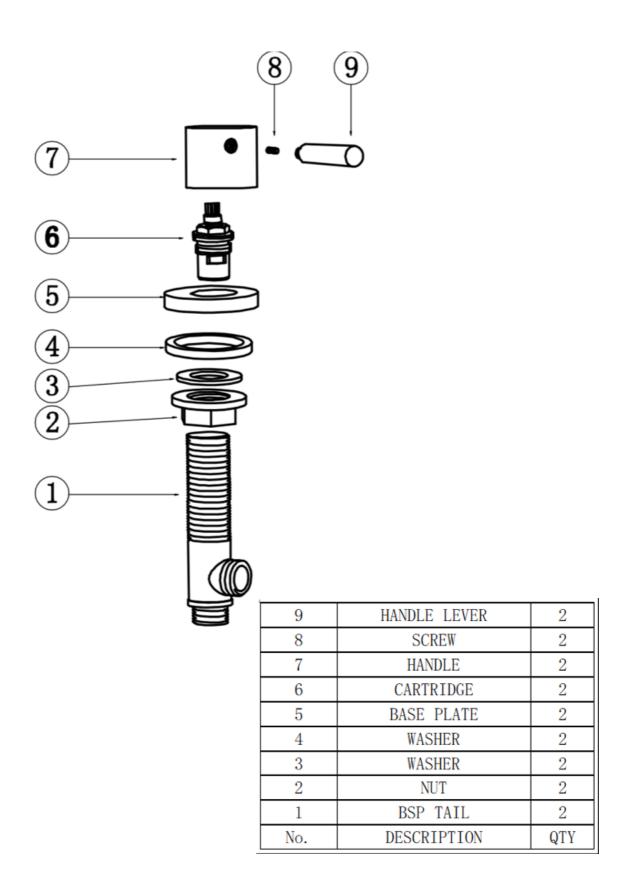

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice