TAPS & SHOWERING

Construction Brass Body, Zinc-alloy Handles

Finishes Chrome plated to BS EN 248

Product Type Contemporary

Water Pressure Min. 0.2 bar, Max. 6.0 bar

Tested Between

Standards Complies with BS5412, BS EN200

Certification Manufactured to comply with WRAS

1/4 Turn 3/4" Ceramic disc valves Cartridge

Net Weight 2380g

Aerator Laminar spout with filter mesh

Brass 3/4" BSP tails **Fitting**

10 years against manufacturing faults Guarantee

(excluding serviceable parts)

Operating Water Pressure



0.2 - 0.5 bar




COMBI BOILER








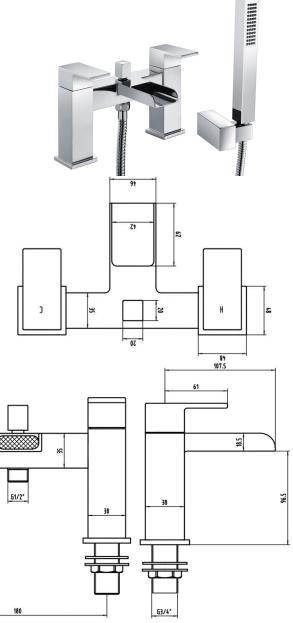

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
	5.3	8.6	-	14.9	22.2	27.2	31.5	40	,	-

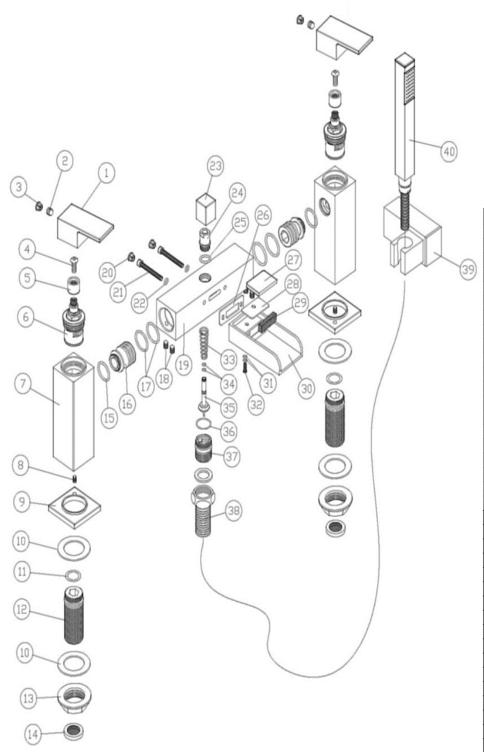

NO.	PARTS DESCRIPTION	QTY
1	ZINC-ALLOY HANDLE	2
2	HANDLE GRUB SCREW	2
3	GRUB SCREW COVER CAP	2
4	CROSS HEAD SCREW	2
5	PVC CORE ADAPTOR	2
6	3/4" CERAMIC DISC CARTRIDGE	2
7	BRASS PILLAR	2
8	BASE PLATE SCREW	2
9	BASE PLATE	2
10	BASE PLATE WASHER	4
11	BSP TAIL O-RING	2
12	G3/4" BSP BRASS TAIL	2
13	BSP TAIL LOCK NUT	2
14	INLET FILTER WASHER	2
15	PILLAR O-RING	2
16	PILLAR CONNECTOR	2
17	MIDDLE BODY O-RING	4
18	MIDDLE BODY SCREW	4
19	BRASS MIDDLE TAP BODY	1
20	COVER CAP	2
21	LONG SCREW	2
22	LONG SCREW O-RING	2
23	DIVERTER CAP	1
24	DIVERTER CONNECTOR	1
25	CONNECTOR O-RING	1
26	SPOUT WASHER	1
27	COVER PLATE	1
28	SEAL	1
29	SPOUT FILTER MESH	1
30	BRASS SPOUT	1
31	SPOUT O-RING	2
32	SPOUT SCREW	1
33	LONG SPRING	1
34	DIVERTER O-RING	2
35	DIVERTER STEM	1
36	HOSE CONNECTOR O-RING	1
37	HOSE CONNECTOR	1
38	1.5M SHOWER HOSE	1
39	ABS HANDSET HOLDER	1
40	ABS SHOWER HANDSET	1