SAGITTARIUS

Construction Finishes Product Type Aerator Water Pressure Plumbing Systems Standards Certification Power

Power Options

Silent Consumption Fitting

Sensing distance Respond time Noise Class Aerator Sensor Max operational temperature Packaging Guarantee Additional Information Brass & stainless steel Chrome plated to BS EN 248 Commercial Anti splash & flow restrictor Min. 0.5 bar, Max. 6.0 bar Suitable for all plumbing systems Complies with EN60529 Manufactured to comply with CE , ROSH , IP56 Voltage: DC6V or AC220V-240V (6V Output) Power consumption: =0.3mW Choice of : i. Batteries only DC (4 x AA batteries)

. Mains power AC supply only

Suitable for cold or premixed water

6 - 24 cm

1 Second

1


iii. Both Mains AC + Batteries DC (backup) connected at the same time 0.003mW Control box: Diameter of 'inlet' pipe: G1/2" Control box: Diameter of 'outlet' pipe: G1/2"

Air Aerator Intergrated spout sensor, Vandal & scratch resistant sensor window Maximum operational temperature 45°C

55 x 38.5 x 33.5cm / carton (10 boxes / carton); 31 x 26.5 x 7cm / inner box. 3 years against manufacturing faults (excluding serviceable parts). i. Suitable for cold or premixed water, and suitable for main or battery installation

ii. This tap is compatible with our new IRC Sensor Remote Control (Sold separately)

DELUX WALL MOUNTED BASIN MIXER CHROME IR/506/C








Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
IR/506/C	-		-	8.35	11.95	-	18.35	27.00	-	-

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

FOR FURTHER ADVICE PLEASE CONTACT :-

SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029 EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK

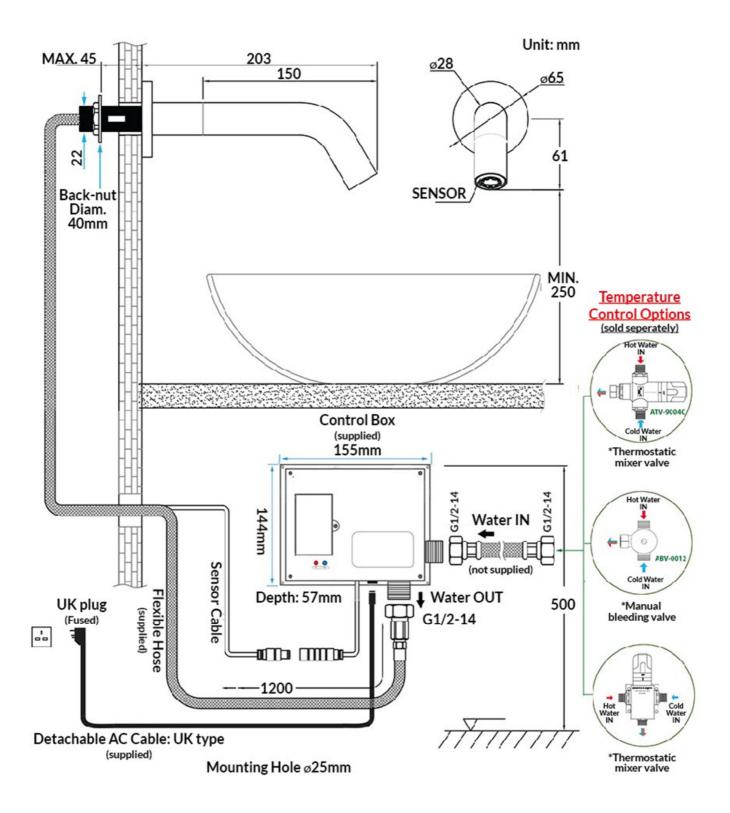

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

FOR FURTHER ADVICE PLEASE CONTACT :-

SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029 EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK