


SAGITTARIUS

TAPS & SHOWERING

Construction	Brass
Dimensions	130mm X 115mm X 25mm
Working pressure	HP/LP/COMBI
Parts	Hot & Cold Indices
	Cold valve—15 mm Ceramic disk quarter turn
	Hot valve— 15mm Ceramic disk quarter turn
	Heads, Collar 1/2 inch, Collar 3/4 inch , Flexi Tails pair 300mm,
	Under tap seating O ring 37mm, Pop up rod, Pop up waste assembly , plastic back nut 22mm, brass back nut, T piece 22mm by 15mm

KENSINGTON 3 HOLE BASIN MIXER BLACK KE/107/B

List of Components
CENTRE TAP
SIDE VALVE HOT
SIDE VALVE COLD
POP UP ROD
FLEXI TAILS 300mm
POP UP WASTE
22MM BRASS BACK NUT
22MM SEATING RING

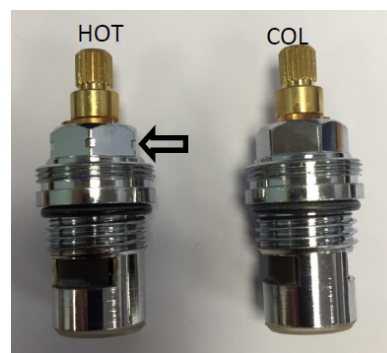

Max Flow blend 45°C

0.2 bar	0.3bar	0.5 bar	1 bar	3 bar
9	11	15	20	22.5

Max Flow Hot Tap

0.2 bar	0.3bar	0.5 bar	1 bar	3 bar
3.5	5.2	7.5	10	14

Max Flow Cold Tap

0.2 bar	0.3bar	0.5 bar	1 bar	3 bar
3.5	5.1	8	9	15.5

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

FOR FURTHER ADVICE PLEASE CONTACT :-
 SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029
 EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK