



SAGITTARIUS

TAPS & SHOWERING

Construction	Brass
Dimensions	405mm X 180mm X 164.5mm
Working pressure	HP/LP/COMBI
Parts	Hot & Cold Indices Cold Valve—15mm ceramic disc valve Hot Valve—15mm ceramic disc valve Heads, collar 1/2 inch, fixing screws, locating nuts

KENSINGTON WALL MOUNTED BASIN MIXER KE/207/C

List of Components
WALL PLATE WITH SPOUT & SIDE VALVES 1/2 INLET
2 X TAP HEADS
MOUNTING BOX
4 X FIXING SCREWS 50mm
4 X LOCATING NUTS

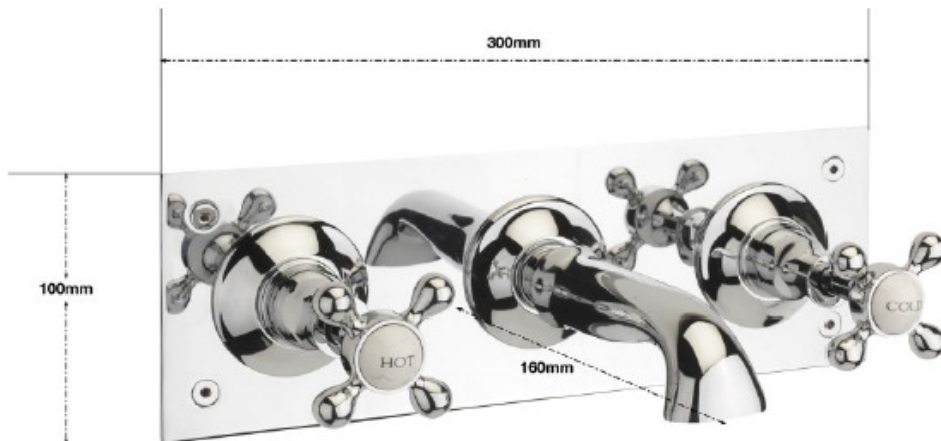

Max Flow blend 45°C

0.2 bar	0.3bar	0.5 bar	1 bar	3 bar
10	16	20	26	32

Max Flow Hot Tap

0.2 bar	0.3bar	0.5 bar	1 bar	3 bar
4.5	7	9.5	11.5	17

Max Flow Cold Tap

0.2 bar	0.3bar	0.5 bar	1 bar	3 bar
4.5	7	9	10.5	16

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

FOR FURTHER ADVICE PLEASE CONTACT :-
SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029
EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK