

# SAGITTARIUS


## TAPS & SHOWERING

**Construction** Brass  
**Dimensions** 315mm X 180mm X 207mm  
**Working pressure** HP/LP/COMBI  
**Parts** Hot & Cold Indices  
 Cold Valve—22mm Ceramic disc quarter turn  
 Hot Valve—22mm Ceramic disc quarter turn  
 Heads, Ceramic diverter lever, shower handset cradle,  
 Hose 1.5m 1/2 x 1/2 conical, handset, handset ceramic  
 insert, Kensington lever diverter unit, wall/ bath  
 mounted shroud, plastic back nut 22mm, Seating  
 washer 22mm, under tap seating O ring, diverter valve,  
 diverter shuttle, cranked legs elbows.

### KENSINGTON DELUXE WALL MOUNTED BSM BLACK KE/305/B

#### List of Components

TAP
HOSE
HANDSET
CRADLE
KENSINGTON WALL ELBOWS X 2

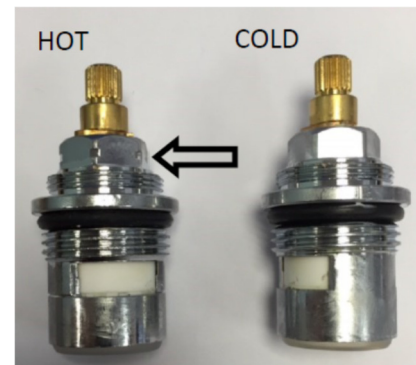

Max flow hot tap	Max Flow Cold Tap	Max Flow blend 45°C	Max Flow blend 42°C (Shower)
4.5   6.8   8.5   10   16	4.5   7   8   10.2   15.5	10   14   20   26   31.5	9     15.5   19   21

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

FOR FURTHER ADVICE PLEASE CONTACT :-  
 SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029  
 EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK