TAPS & SHOWERING


Construction Finishes Product Type Water Pressure **Plumbing Systems** Standards Certification Cartridge Aerator Fitting Packaging Guarantee


Brass Body (CuZn40Pb18) Chrome plated to BS EN 248 Contemporary Min. 0.2 bar, Max. 6.0 bar Suitable for all plumbing systems Complies with BS5412, BS EN200 Manufactured to comply with WRAS 1/4 Turn 1/2" Ceramic Disc Valves Adjustable Air Aerator M10 x 500mm flexible connection pipes 52 x 42 x 26cm 10 years against manufacturing faults (excluding serviceable parts).

KINETIC MONOBLOC SINK MIXER BRUSHED NICKEL

KI/154/N



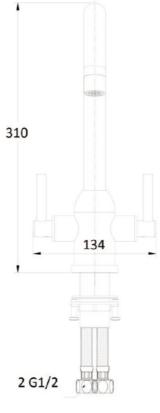

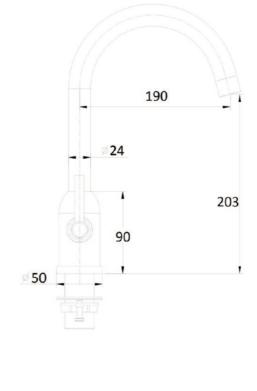


Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
KI/154/N	-	4.0	-	6.8	9.5	-	14.0	17.0	,	-

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

FOR FURTHER ADVICE PLEASE CONTACT :-

SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029 EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK

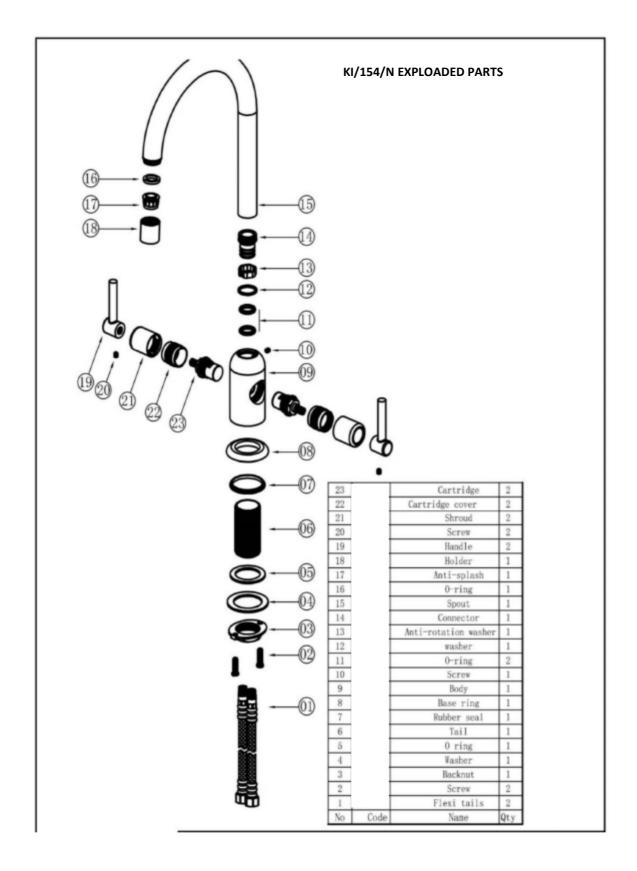

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

FOR FURTHER ADVICE PLEASE CONTACT :-

SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029 EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK