


SAGITTARIUS

TAPS & SHOWERING

Construction	Brass Body (CuZn40Pb18); Stainless steel Spout; Zinc-alloy Handles & Base plate
Finishes	Chrome plated to BS EN 248
Product Type	Contemporary
Water Pressure Tested Between Standards	Min. 0.3 bar, Max. 6.0 bar
Cartridge	Complies with BS5412, BS EN200 1/4 Turn 1/2" Ceramic disc valves
Aerator	Male M24x1 ABS Spout aerator
Fitting	G1/2" BSP Female Flexible inlet connection hoses
Guarantee	10 years against manufacturing faults (excluding serviceable parts)
Additional Information	360° Swivel Spout

TRENTINO MONOBLOC SINK MIXER CHROME

KTS/230/C

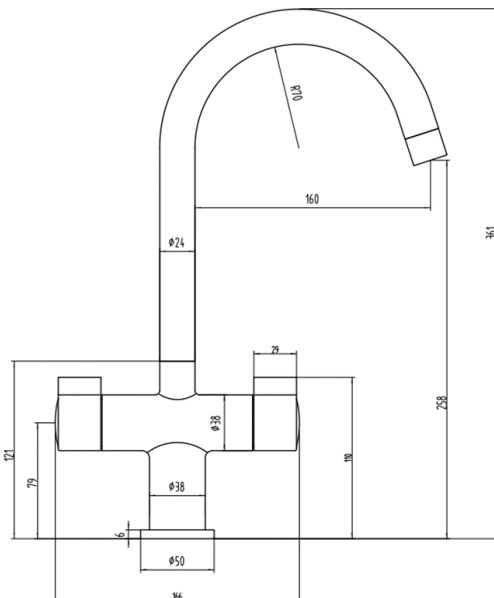

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

FOR FURTHER ADVICE PLEASE CONTACT :-

SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029

EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK

Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
	-	4.5	-	6.5	9.4	12.7	15.2	18.6	-	-

No.	DESCRIPTION	QTY
1	M5*8 HANDLE GRUB SCREW	2
2	HANDLE	2
3	M4*8 CROSS HEADED SCREW	2
4	PLASTIC CARTRIDGE CONNECTOR	2
5	RED HOT CARTRIDGE COLLAR	1
6	½" HOT CARTRIDGE	1
7	½" COLD CARTRIDGE	1
8	BLUE COLD CARTRIDGE COLLAR	1
9	TAP BRASS BODY	1
10	ZINC ALLOY BASE PLATE	1
11	46*38*2.5 NBR WASHER	1
12	48*2 RUBBER FIXING WASHER	1
13	49*3 HORSE-SHOE FIXING PLATE	1
14	8*100 FIXING ROD	1
15	SW10*10 BRASS FIXING NUT	1
16	STAINLESS STEEL SPOUT	1
17	18*2 NBR O-RING	1
18	18*1.5 SPOUT CONNECTOR	1
19	PLASTIC CONNECTOR	1
20	18*2.4 NBR O-RING	2
21	21*19*1.2 PLASTIC WASHER	1
22	M4*4 SPOUT GRUB SCREW	1
23	20.8*15*2 NBR AERATOR WASHER	1
24	M24*1 AERATOR	1
25	M22*1 AERATOR CASING	1
26	10*1*G1/2*40 FLEXITAIL	2

