SAGITTARIUS

TAPS & SHOWERING


Construction	Brass Body (CuZn40Pb18); Zinc- alloy Handles	CONTRACT MONOBLOC SINK MIXER
Finishes	Chrome plated to BS EN 248	
Product Type Water Pressure Tested Be-	Contemporary Min. 0.2 bar, Max. 6.0	KTS/239/C
tween Standards	bar Complies with BS5412, BS EN200	
Cartridge	1/4 Turn 1/2" Ceramic Disc Valves	
Fitting	10mm G1/2" BSP Flex- ible inlet connection hoses	ONTR
Aerator Guarantee	Spout aerator 10 years against manu- facturing faults (excluding serviceable parts)	
Water pressure	L2-15+bar	

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

1

FOR FURTHER ADVICE PLEASE CONTACT :-

SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029 EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK

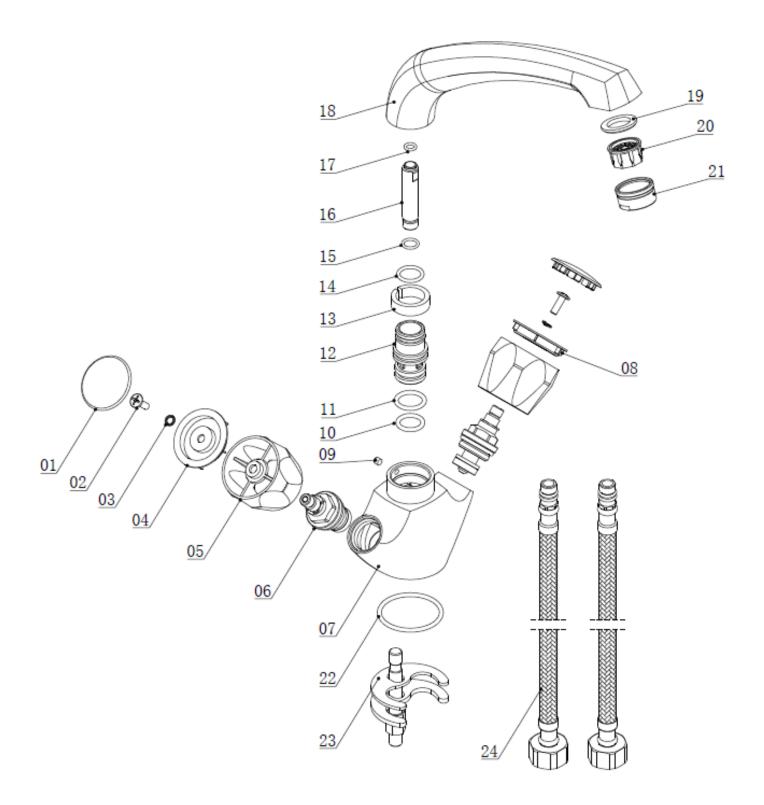

FOR FURTHER ADVICE PLEASE CONTACT :-

SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029 EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK