## **TAPS & SHOWERING**

**LATINO MONO BLOC** 

Construction

Brass Body, Zincalloy Handles & Base plates

**BASIN MIXER** 

**Finishes** 

Chrome plated to BS

**Product Type** 

**Water Pressure Tested Between** 

Contemporary Min. 0.2 bar, Max.

Complies with

35mm Ceramic disc

M24\*1 ABS Spout

UK: M10 x 350mm

G1/2" BSP Female

EU: M10 x 350mm G3/8" BSP Female

10 years against manufacturing faults (excluding servicea-

sprung waste (UK

Flexi Tails

Flexi Tails

ble parts)

LA/106

**Standards** 

Cartridge

**Aerator** 

**Fitting** 

Guarantee

**Additional Information** 

**Operating Water Pressure** 

**LOW PRESSURE** 

0.2 - 0.5 bar


**COMBI BOILER** 

**HIGH PRESSURE** 

1.2 - 1.5+ bar






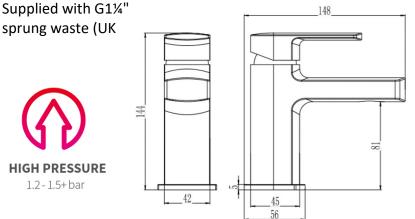

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

## Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
	-	5.1	-	7.8	11.3	13.7	16.7	18.2	-	-

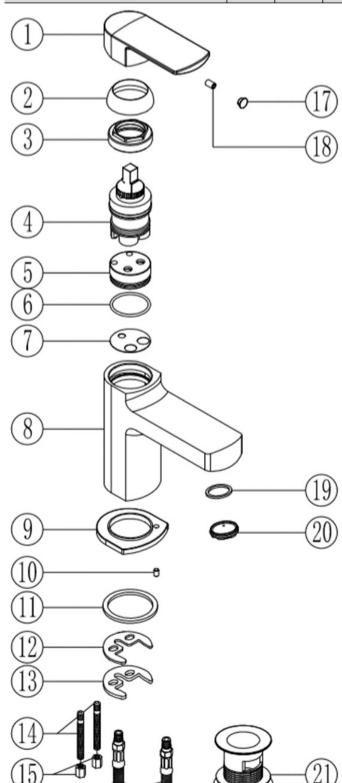

NO.	PARTS DESCRIPTION	QTY
1	ZINC-ALLOY HANDLE	1
2	PLASTIC HANDLE COLLAR	1
3	BRASS CARTRIDGE NUT	1
4	35MM CERAMIC CARTRIDGE	1
5	CARTRIDGE SEAT	1
6	NBR CARTRIDGE SEAT O-RING	1
7	S/S CARTRIDGE SEAT WASHER	1
8	BRASS TAP BODY	1
9	ZINC-ALLOY BASE PLATE	1
10	S/S BASE PLATE GRUB SCREW	1
11	NBR BASE PLATE WASHER	1
12	HORSE-SHOE WASHER	1
13	HORSE-SHOE STEEL PLATE	1
14	METAL FIXING ROD	2
15	BRASS FIXING NUT	2
16	G1/2" BSP S/S FLEXI-TAIL	2
17	PLASTIC COVER CAP	1
18	S/S HANDLE GRUB SCREW	1
19	NBR AERATOR WASHER	1
20	M24*1 ABS AERATOR	1
21	G1-1/4" ZINC-ALLOY	1
	SPRUNG WASTE	1