## **TAPS & SHOWERING**

LIVORNO DUAL PUSH

LI/377/C

**BUTTON THERM CONCEALED** 

Construction Brass Body CuZn40Pb2, EN CW617N (equivalent to BS CZ122)

Zinc alloy Handle

Chrome : Ni : 8-12um, Cr : 0.25-0.3um Finishes

Product Type

Contemporary Min. 1.0 bar, Max. 6.0 bar Water Pressure

Suitable for all plumbing systems, preferably balanced. Min supply pressure differential requirement Plumbing Systems

Complies with BSEN 1111 Standards

Certification

Cartridge Check Valve triduon® thermostatio Neoperl DW15-PR

Diverter Wall Plate Select Technology Stainless steel (Handle: Zinc Alloy) EZ-BOX - Inlet G¾", Outlet G½"
55 x 37 x 33cm / carton (8 boxes / carton) Fitting Packaging

Guarantee 10 years against manufacturing faults (excluding serviceable parts).


Additional Information 1.Temperature: Pre-set 38°C. Max 45°C


2. Automatic shut off in the event of hot or cold water supply failure.















## Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
LI/377/C	-	-	-	3.9	8.0	-	13.0	16.0	19.0	22.0

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

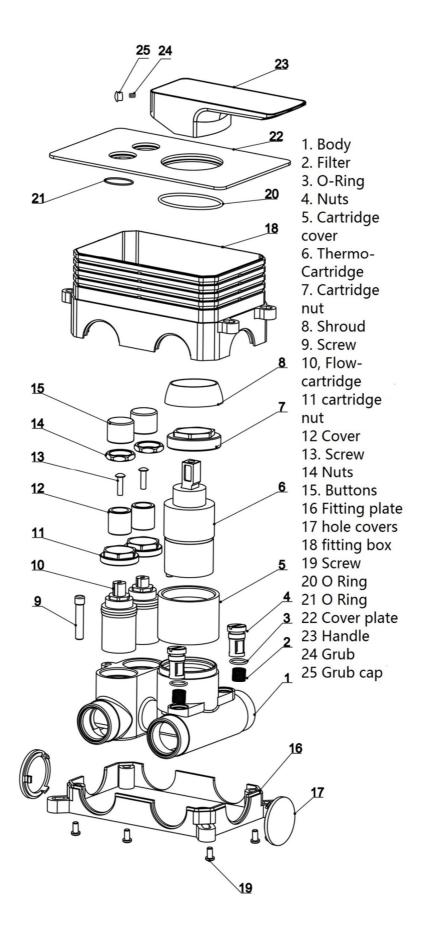

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice