SAGITTARIUS

TAPS & SHOWERING

Construction Brass Body (CuZn38Pb18); Zinc alloy handle

Finishes Chrome plated to BS EN 248

Product Type Contemporary

Water Pressure Min. 0.2 bar, Max. 6.0 bar

Plumbing Systems Suitable for all plumbing systems, preferably balanced.Min. supply pressure differential

requirement is 5:1

Standards Complies with BSEN 1111

Certification

Check Valve 0.5-10 gpm Aerator Neoperl Aerator

Cartridge Thermostatic, Integrate diverter ceramic disc valve

Fitting Easy fit

Packaging 55 x 35 x 35cm / carton (8 boxes / carton)


Guarantee 10 years against manufacturing faults (excluding serviceable parts).


Additional Information 1.Temperature: Pre-set 38°C, with push button override to 48°C.

2. Automatic shut off in the event of hot or cold water supply failure.

MESSINO THERMOSTATIC
BATH SHOWER MIXER
ME/198/C





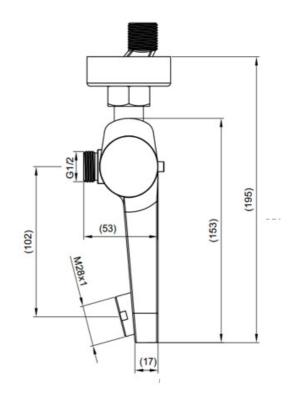


Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
ME/198/C	3.3	7.0	6.0	11.0	11.2	13.9	16.1	20.0	23.3	26.1

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

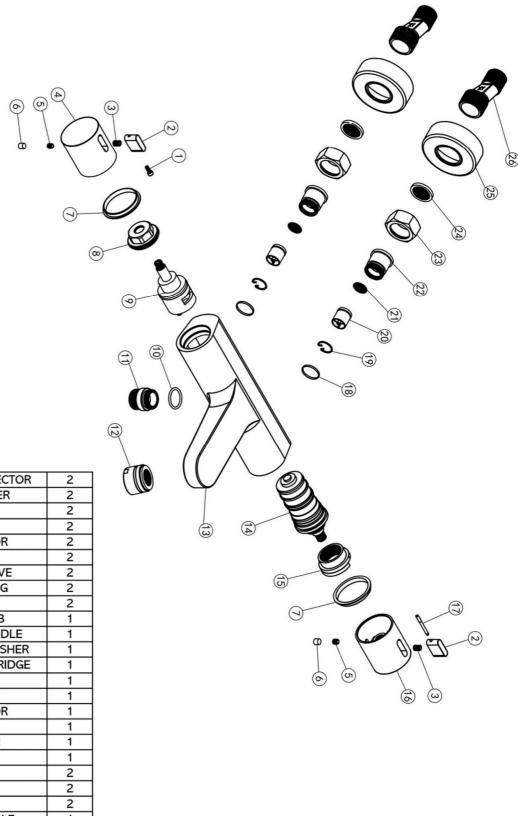

26	OFFSET-CONNECTOR	2
25	WALL-COVER	2
24	WASHER	2
23	NUT	2
22	CONNECTOR	2
21	FILTER	2
20	CHECK VALVE	2
19	CALMP-RING	2
18	O-RING	2
17	LEVER ROB	1
16	THERMO-HANDLE	1
15	MOUNTING WASHER	1
14	THERMO-CARTRIDGE	1
13	BODY	1
12	AERATOR	1
11	CONNECTOR	1
10	O-RING	1
9	DIVERTER	1
8	NUT	1
7	WASHER	2
6	CAP	2
5	GRUB	2
4	FLOW HANDLE	1
3	SPRING	2
2	BUTTON	2
1	SCREW	1
No.	DESCRIPTION	QTY

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice