SAGITTARIUS

TAPS & SHOWERING

Construction Brass Body CuZn40Pb2, EN CW617N (equivalent to BS CZ122)

Zinc alloy Handle

Chrome plated to BS EN 248

Contemporary

Min. 0.5 bar, Max. 6.0 bar Suitable for all plumbing systems Complies with BS6920, BS EN200

-

Finishes Product Type

Standards

Aerator

Fitting

Certification Cartridge

Water Pressure

Plumbing Systems

25mm Ceramic Disc Cartridge

Laminar spout

UK: M10 x 350mm ½" BSP Female Flexi Tails EU: M10x350mm 3/8" BSP Female Flexi Tails.

Packaging 43 x 30 x 40cm / carton (8 boxes / carton)

Guarantee 10 years against manufacturing faults (excluding serviceable parts).


Additional Information Supplied with G 1¼" sprung waste (UK only)

NICE MINI MONO BASIN

MIXER CHROME

NI/306/C




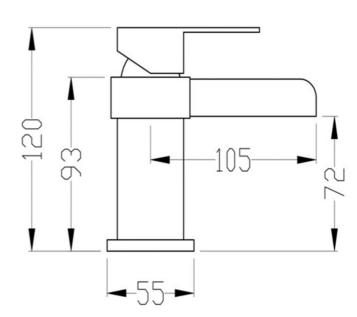

Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
NI/306/C	1.00	1.70	-	4.20	6.50	8.00	9.50	-	-	-

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

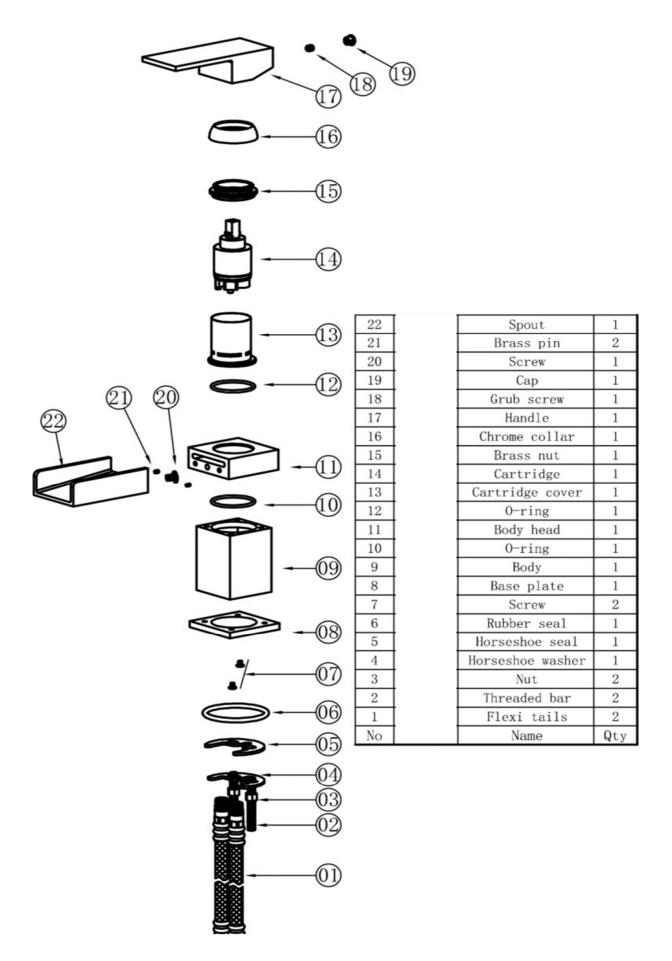

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice