TAPS & SHOWERING

Brass Body (CuZn38Pb18) Construction Chrome plated to BS EN 248 Finishes

Contemporary Product Type Min. 0.5 bar, Max. 6.0 bar

Suitable for all plumbing systems, preferably balanced. Min. supply pressure differential requirement is 5:1**Plumbing Systems**

Complies with BSEN 1111 Standards

Certification Manufactured to comply with WRAS, TMV2 Cartridge Thermostatic; Ceramic disc cartridge

Fitting G1/2" BSP TAILS


Check valve 0.5-10 gpm Packaging


38 x 22 x 29cm / carton (10 boxes / carton) Guarantee 10 years against manufacturing faults (excluding serviceable parts).

Additional Information 1.Temperature: Pre-set 38°C, with push button override to 48°C. 2. Automatic shut off in the event of hot or cold water supply failure.

MILAN VERTICAL EXPOSED SHOWER VALVE CHROME SH/163/C






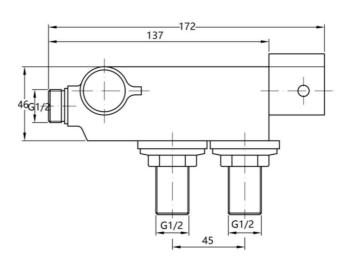

Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
SH/163/C	4.0	6.5		9.5	11.0	13.3	15.1	16.9		

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

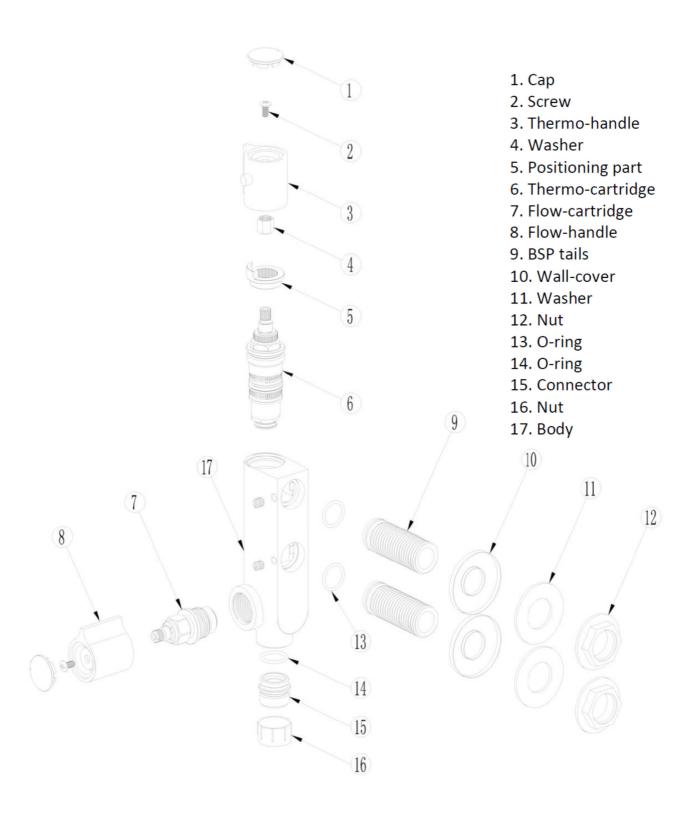

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice