SAGITTARIUS

TAPS & SHOWERING

Construction Brass Body (CuZn38Pb18); Zinc alloy handle

Finishes Chrome plated to BS EN 248
Product Type Contemporary

Water Pressure Min. 0.5 bar, Max. 6.0 bar

Plumbing Systems Suitable for all plumbing systems, preferably balanced.Min. supply pressure

differential requirement is 5:1 Complies with BSEN 1111

Standards C Certification -

Cartridge Thermostatic

Fitting Easy Fit (15mm compression connection)
Valve Integrate diverter ceramic disc valve

Check valve 0.5-10 gpm

Packaging 86 x 43.5 x 50cm / carton (5 boxes / carton)

Guarantee 10 years against manufacturing faults (excluding serviceable parts). **Additional Information** 1.Temperature: Pre-set 38°C, with push button override to 48°C.

2. Automatic shut off in the event of hot or cold water supply failure.


3.Shower head : Chrome , Ø225mm, ABS 4.Shower handset : Chrome , 3 mode, ABS

5.Shower hose : Chrome PVC,1.5m 6. COOL TOUCH technology

7.Stainless steel adjustable riser rail



AURORA DELUXE EXPOSED VALVE AND RIGID RISER KIT SH/610/C

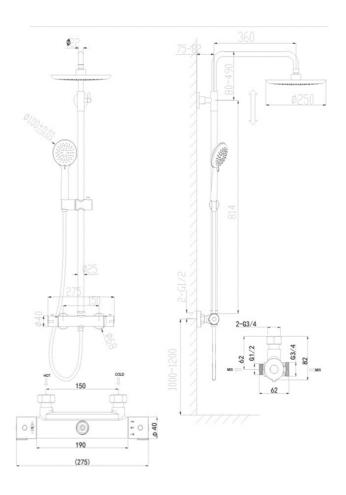


Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
SH/610/C	3.7	6.7	9.2	12.6	18.4	22.8	26.4	33.0	38.5	43.4

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

SH/610/C EXPLOADED DRAWING

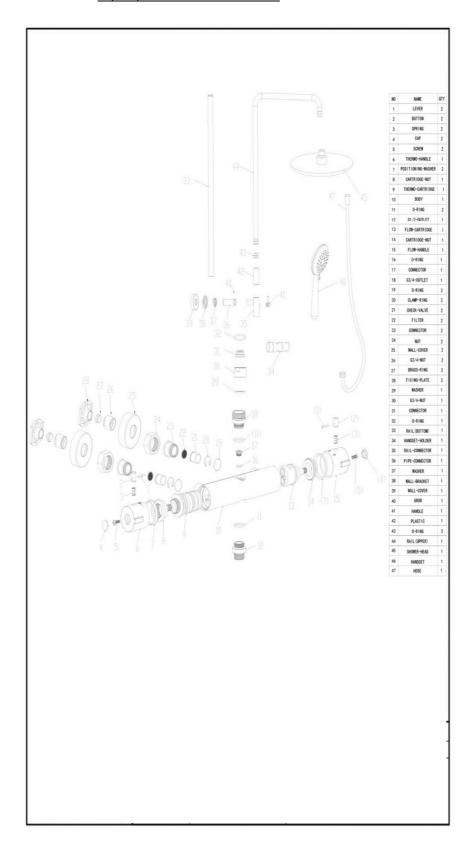

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice