## **TAPS & SHOWERING**

SH/627/C

Construction Brass Body (CuZn40Pb18) **Finishes** Chrome plated to BS EN 248

Contemporary **Product Type** 

Min. 0.2 bar, Max. 6.0 bar **Water Pressure** Suitable for all plumbing systems **Plumbing Systems** Complies with BS5412, BS EN200 Standards Manufactured to comply with WRAS, TMV2 Certification

Triduon® Cartridge Aerated Aerator Flexi tail pipe Fitting

28.5 x 24 x 34cm / carton (8 boxes / carton) **Packaging** 


1 years against manufacturing faults (excluding serviceable parts). Guarantee

Handle: Zinc Alloy

Additional Information Max temperature 41°c +\- 2°c

THERMOSTATIC EXTENDED LEVER TMV2 MONO BASIN



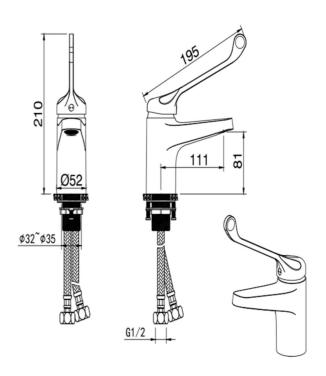


## Flow Rates (Litres per minute)

(= · -										
System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
SH/627/C	-	2.7	-	3.0	4.5	-	6.3	8.5		-

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

## **EXPLOADED DIAGRAM SH/627/C**

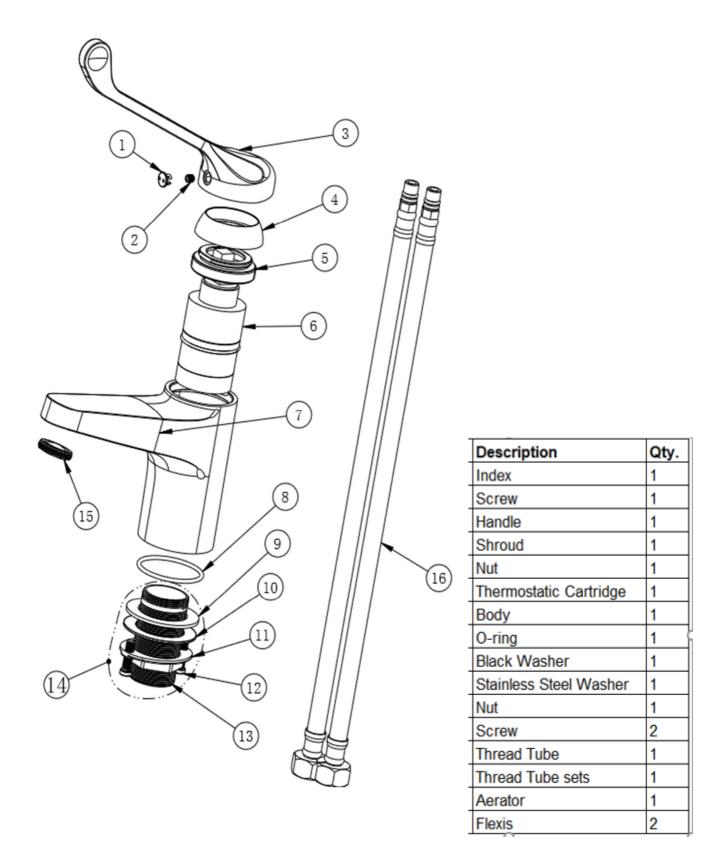

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice