# SAGITTARIUS

## **TAPS & SHOWERING**

Construction Brass Body (CuZn40Pb18)

Finishes Chrome: Ni: 8-12um, Cr: 0.25-0.3um

Product Type Contemporary

Water Pressure
Plumbing Systems
Standards

Min. 0.5 bar, Max. 6.0 bar
Suitable for all plumbing systems
Complies with BS5412, BS EN200

Certification Manufactured to comply with WRAS, TMV2

Triduon®

Cartridge Adjustable Slim Air
Brass 3/4" BSP tail

Fitting 53 x 44 x 33cm / carton (4 boxes / carton)


Packaging 1 years against manufacturing faults (excluding serviceable parts).

Guarantee Handle: Zinc Alloy

Additional Information Max temperature 46°c +\- 2°c

BATH SHOWER CHROME SH/628/C

THERMOSTATIC LEVER TMV2

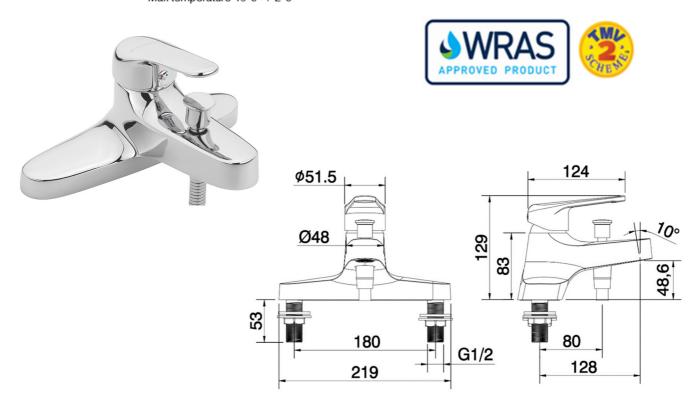

## Flow Rates (Litres per minute)


(2.00)										
System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
SH/628/C	-	4.5	-	7.4	10.5	12.8	14.6	17.9	-	-

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

### FOR FURTHER ADVICE PLEASE CONTACT:-

### **EXPLOADED DIAGRAM SH/628/C**

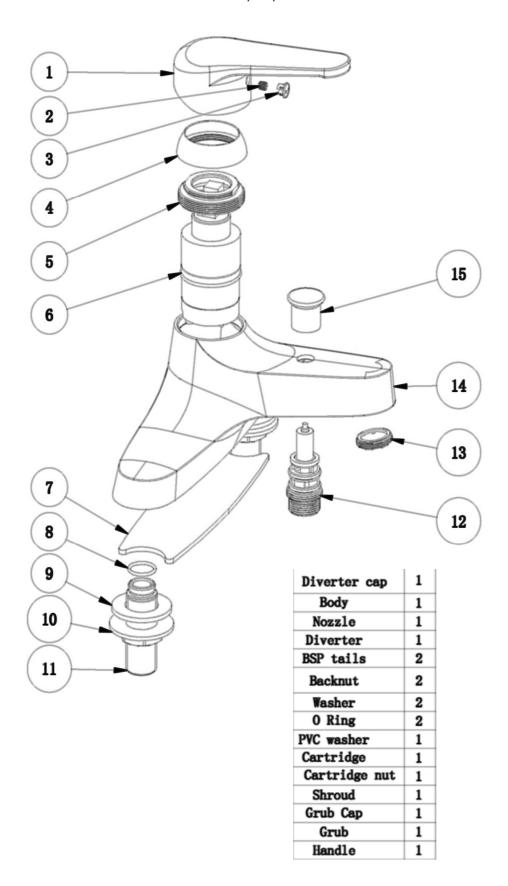

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice