TAPS & SHOWERING

Construction Brass Body (CuZn38Pb18) **Finishes** Chrome plated to BS EN 248 **Product Type** Contemporary

Water Pressure Min. 0.5 bar, Max. 6.0 bar

Plumbing Systems Suitable for all plumbing systems, preferably balanced. Min. supply pressure

differential requirement is 5:1 Standards Complies with BSEN 1111

Certification

Cartridge 1/4 Turn 1/2" Ceramic Disc Divertor Cartridge

Fitting 3/4" BSP

Packaging 92 x 40 x 68cm / carton (5 boxes / carton)


Guarantee 10 years against manufacturing faults (excluding serviceable parts).

Additional Information 1. Shower head: Chrome, Ø225mm, ABS 2.Shower handset: Chrome, ABS

3. Shower hose: Stainless steel ,1.5m 4. Stainless steel adjustable riser rail

TROPIC RIDGID RISER & **DIVERTER CHROME** SH/674/c



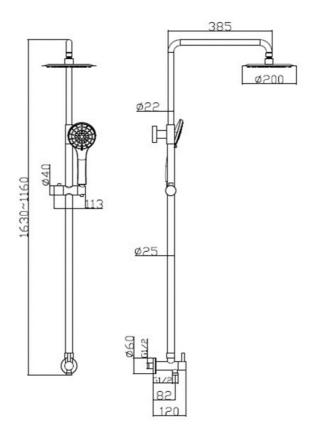


Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
SH/674/C	2.7	4.2	5.3	7.1	10.3	12.7	14.7	18.1	21.1	23.6

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

Exploded diagram SH/674/C

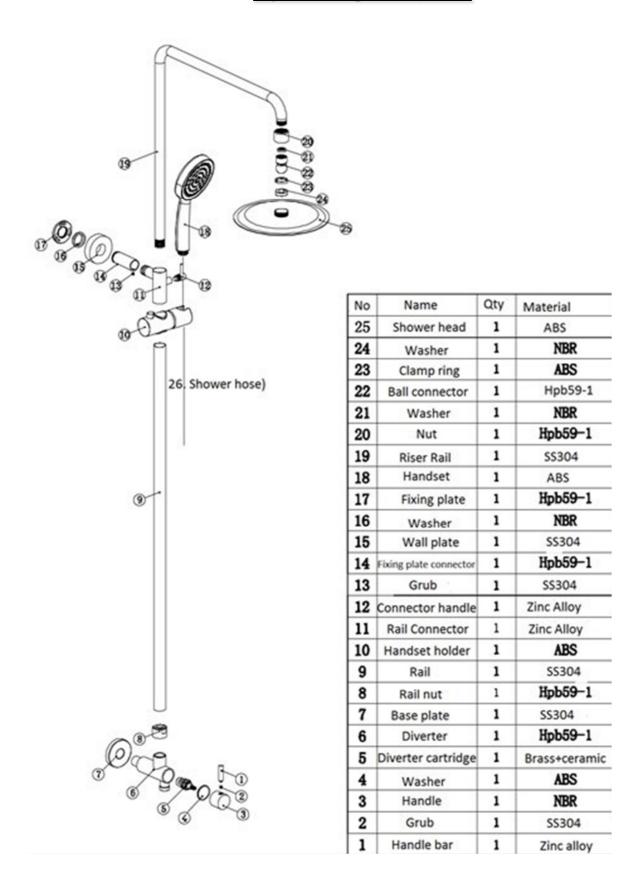

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice