SAGITTARIUS

TAPS & SHOWERING

Construction Brass Body (CuZn38Pb18), ABS Handles

Finishes Chrome plated to BS EN 248

Product Type Contemporary

Water Pressure Min. 0.5 bar, Max. 6.0 bar

Tested Between

Will 0.0 Bar, Wax. 0.0 Bar

Standards Complies with BSEN 1111

Certification -

Cartridge Thermostatic and ceramic disc valve

Check valve 0.5-10 gpm

Fitting Brass S-Unions male offset cranked connectors

G1/2 inch x G3/4" BSP (Escutcheon)

Guarantee 10 years against manufacturing faults (excluding

serviceable parts)

Additional Infor-

mation

Thermostatic cartridge maintains showering temperature to +/- 1°C by compensating for changes in the incoming water temperature and pressure giv-

ing the stable outlet

Automatic shut off in the event of hot or cold water

supply failure

Shower handset : Chrome , Single mode, ABS

Shower hose : Chrome, stainless steel , double

interlock, 1.5m

Telescopic adjustable height shower rail

ROMA HP SHOWER PACK

CHROME

SS/607/C




Flow Rates (Litres per minute)


	,									
System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
	2.4	3.8	-	6.7	10.9	-	14.7	17.3	-	-

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

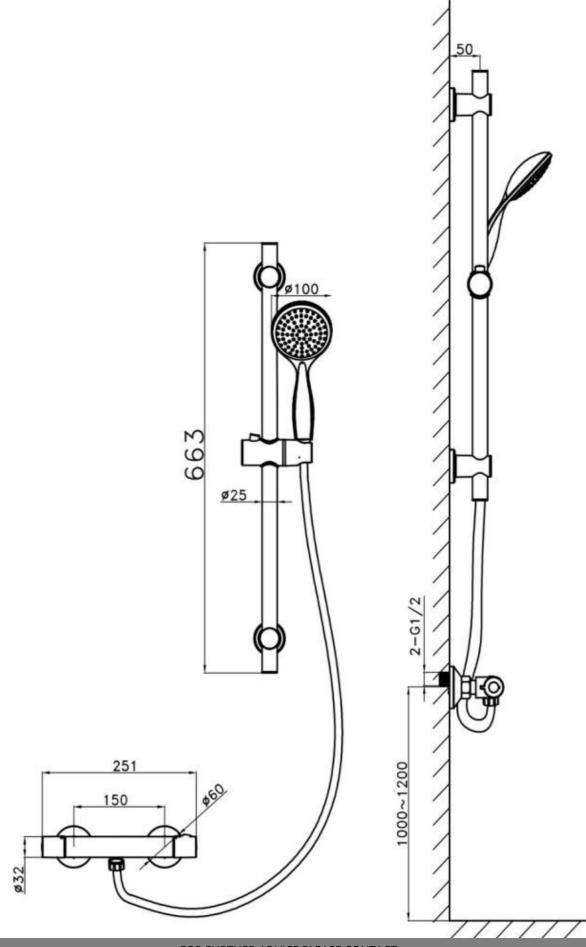

FOR FURTHER ADVICE PLEASE CONTACT :SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029
EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK

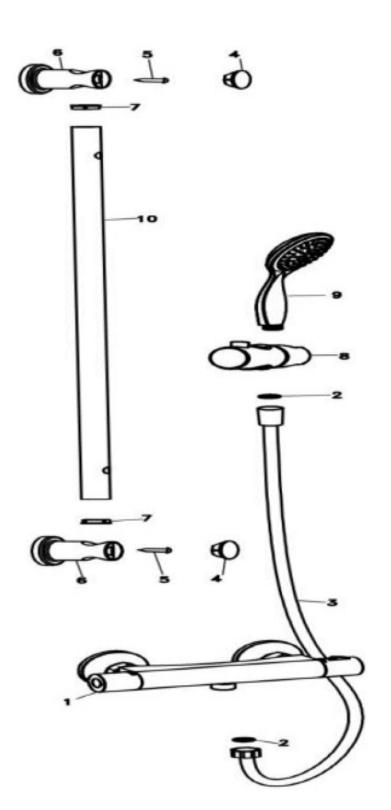

NO	NAME	QTY
1	BADY	1
2	WASHER	2
3	HOSE	1
4	CAP	2
5	SCREW	2
6	WALL-FIX-PLATE	2
7	RAIL-END-CAP	2
8	HANDSET-HOLDER	1
9	HANDSET	1
10	RAIL	1