## **TAPS & SHOWERING**

RISER KIT SS/625/C

Valve: High Performance Polyamide (PPA) Body & SS201 Stainless steel Construction

Casing; Stainless steel Rail; Stain-

less steel Base plates; ABS Handles EXPOSED VALVE AND

**Finishes** CHROME

**Product Type** Contemporary

Water Pressure Tested Min. 0.5 bar, Max. 6.0 bar

Between

**Standards** Complies with BSEN 1111

Certification WRAS approved and certified

Cartridge **Thermostatic** 

Diverter Integrated ceramic disc valve divert-

**Fitting** S-Union connectors (Male thread

offset 1/2 inch x 3/4" BSP with Escutcheon); Brass G1/2" BSP Male bottom outlet & G3/4" BSP Male up-

per outlet connection

5 years against manufacturing faults Guarantee

(excluding serviceable parts)

Additional Information 1. Temperature: Pre-set 38°C, with

push button override to 48°C

2. Automatic shut off in the event of

hot or cold water supply failure 3. COOL TOUCH Bar Valve technol-

ogy

4. Ultra Slim Shower head: 200mm

5. Shower handset: ABS, 3 modes

6. Handset holder: ABS,

adjustable height


7. Shower hose: PVC 1.5m


8. Telescopic adjustable height riser


rail: Stainless steel



The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

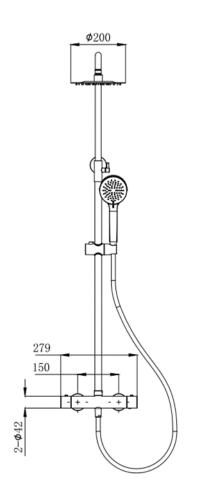

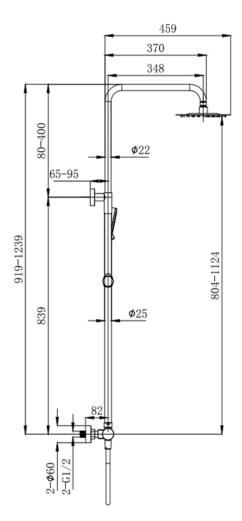










## Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
Handset	3.1	-	5.8	7.8	11.4	-	16.5	20.2	23.3	26.1
howerhead	2.8	-	5.6	7.7	11.3	-	16.4	20.1	23.4	26.1

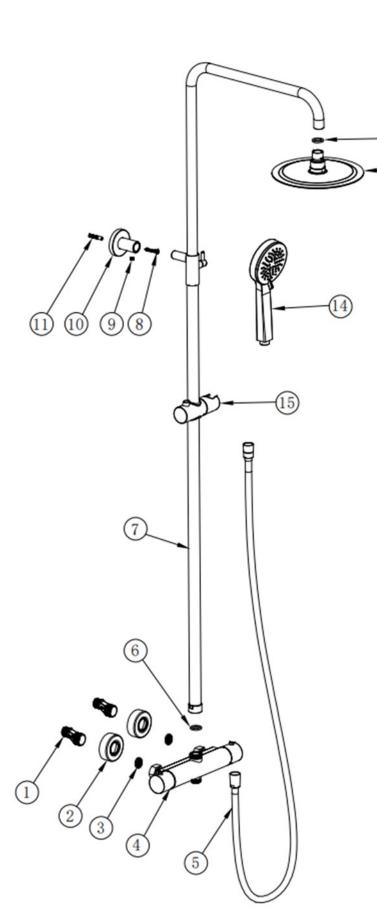

NO.	NAME	QTY.
1	S-UNION	2
2	BASE PLATE	2
3	LOCK NUT	2
4	BODY	1
5	HOSE	1
6	O-RING	1
7	RAIL	1
8	SCREW	1
9	SCREW	1
10	WALL BUCKET	1
11	SCREW	1
12	O-RING	1
13	SHOWER HEAD	1
14	HANDSET	1
15	HANDLE HOLDER	1