

SAGITTARIUS

Product Code	SS/804/C
Description	Shower Concept Four
Finish	Chrome
Design	Contemporary
Plumbing System	High Pressure, Combination Boiler
Operating System	Minimum Pressure 1.0 to 6.0 Bar
Cartridges	Thermostatic Cartridge & Ceramic Disc Diverter Cartridge
Approval	WRAS Approved
Guarantee	10 Years On Casting & Chrome Finish. 3 Years On Serviceable Moving Parts.
Additional Information	Shower Head- G1/2" BSP Female thread. Ø250mm Shower Head. Shower Arm- G1/2" BSP, 380mm Length. Shower Valve- Inlet: Two Brass G3/4" BSP Female Thread, Outlet: One Brass G1/2" BSP Female thread. Temperature: Pre-set 38°C, with push button override to 48°C. Automatic shut off in the event of hot or cold water supply failure. Anti-Calc Thermostatic cartridge for easy maintenance. Bath Centrafill- Inlet: G3/4" BSP; Waste: G1-1/2" BSP. Centre to centre length : 85cm; suitable for Bath with 5-15mm thickness.




FOR FURTHER ADVICE PLEASE CONTACT :-

SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0161 6202029


Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
Handset	4.5	7.1	-	9.1	12.8	-	18.1	22.8	26.2	28.3
Shower Head	4.7	7.4	-	9.4	13.4	-	19.0	23.2	27.1	29.9

SV/587/C:

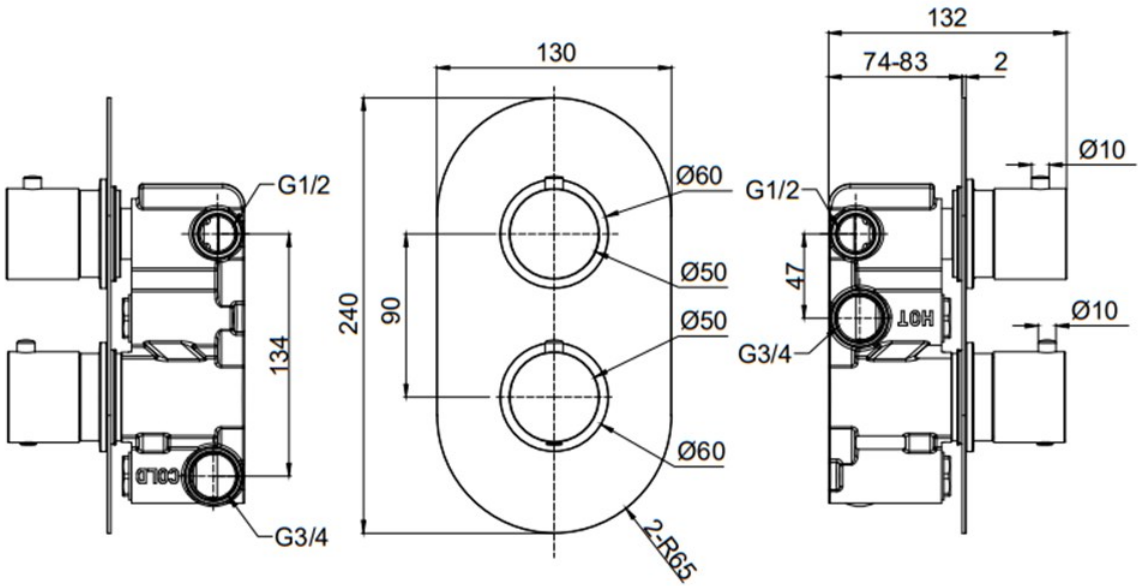

SHA/378/C:

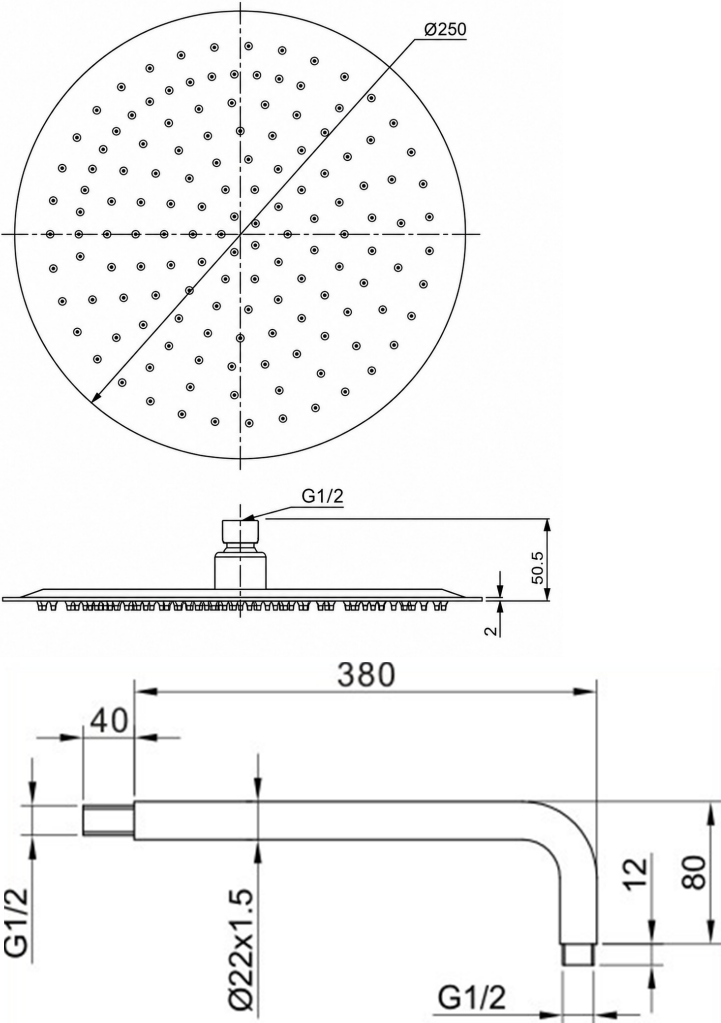

WBT/436/C

