

SAGITTARIUS

Product Code	SS/806/C
Description	Shower Concept Sixteen
Finish	Chrome
Design	Contemporary
Plumbing System	High Pressure, Combination Boiler
Operating System	Minimum Pressure 1.0 to 6.0 Bar
Cartridges	Thermostatic Cartridge & Ceramic Disc Diverter Valve
Approval	WRAS Approved
Guarantee	10 Years On Casting & Chrome Finish. 3 Years On Serviceable Moving Parts.

Additional Information

Shower Valve- Inlet: Two Brass G3/4" BSP Female Thread, Outlet: One Brass G1/2" BSP Female thread.
Temperature: Pre-set 38°C, with push button override to 48°C.
Automatic shut off in the event of hot or cold water supply failure.
Anti-Calc Thermostatic cartridge for easy maintenance.

Shower Outlet- Brass G1/2" BSP Tail

Slide Rail Kit- ABS 3 Mode Handset, Adjustable Handset Holder & 1.5m PVC Shower Hose



The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.
We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice


FOR FURTHER ADVICE PLEASE CONTACT :-

SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0161 6202029


Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
	5.8	7.4	8.7	11.1	15.5	18.9	21.8	26.5	30.5	33.8


SRK/541/C:

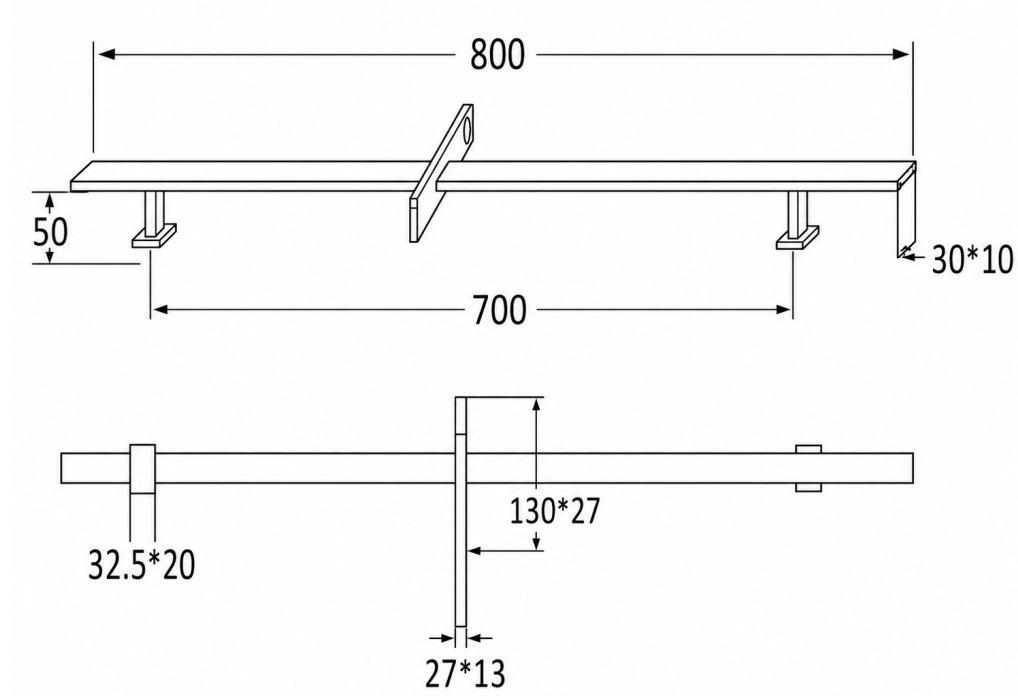

SH/521/C:

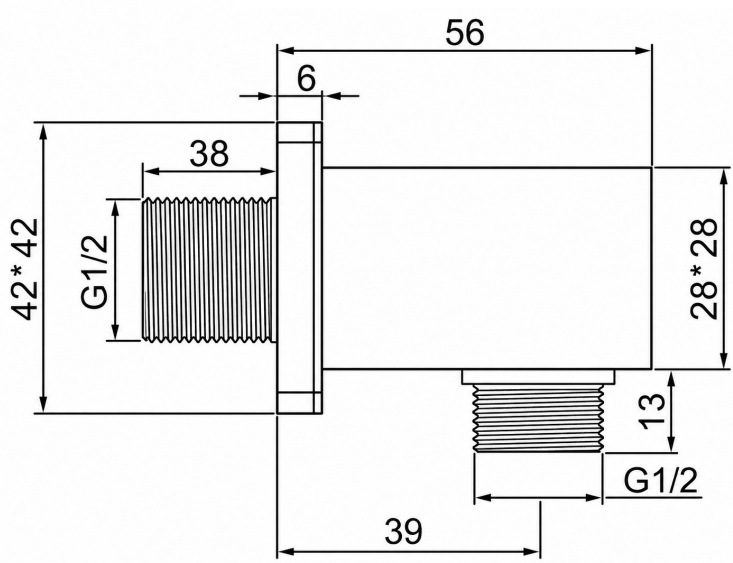

SV/572/C:

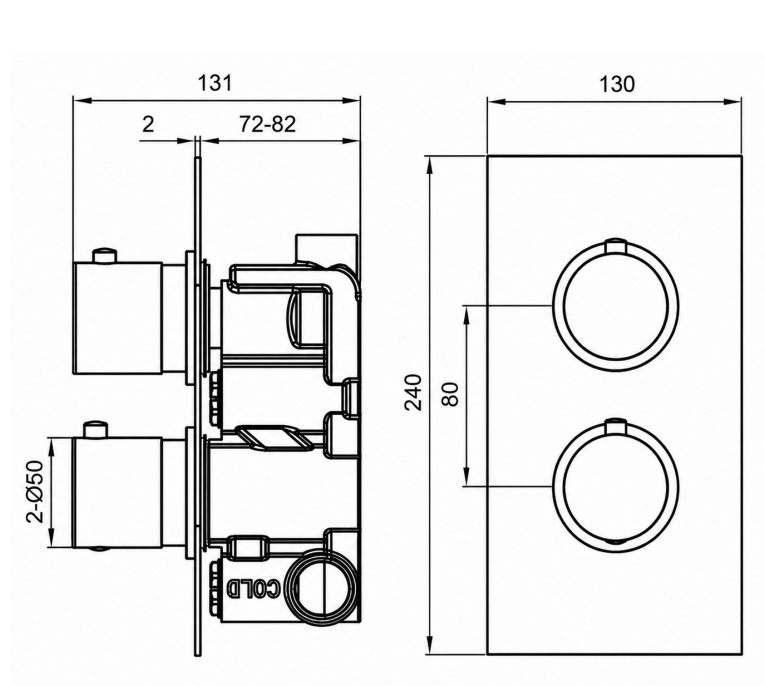

FOR FURTHER ADVICE PLEASE CONTACT :-

SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0161 6202029