

SAGITTARIUS

Product Code	SS/810/C
Description	Shower Concept Twenty
Finish	Chrome
Design	Contemporary
Plumbing System	High Pressure, Combination Boiler
Operating System	Minimum Pressure 1.0 to 6.0 Bar
Cartridges	Thermostatic Cartridge & Ceramic Disc Diverter Cartridge
Approval	WRAS Approved
Guarantee	10 Years On Casting & Chrome Finish. 3 Years On Serviceable Moving Parts.
Additional Information	Shower Valve- Inlet: Two Brass G3/4" BSP Female Thread, Outlet: One Brass G1/2" BSP Female thread. Temperature: Pre-set 38°C, with push button override to 48°C. Automatic shut off in the event of hot or cold water supply failure. Anti-Calc Thermostatic cartridge for easy maintenance. Bath Centrafill- Inlet: Brass G3/4" BSP Male thread; Waste: PP G1-1/2" BSP Male thread. Centre to centre length : 85cm; suitable for Bathtub with 5-17mm thickness Shower Outlet- Brass G1/2" BSP Tail Slide Rail Kit– ABS 3 Mode Handset, Adjustable Handset Holder & 1.5m PVC Shower Hose




FOR FURTHER ADVICE PLEASE CONTACT :-

SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0161 6202029


Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
(Handset)	5.2	6.7	7.9	10.0	14.0	17.1	19.8	24.0	27.9	31.0
(Shower Head)	5.1	6.5	7.8	9.7	13.8	16.8	19.4	23.5	27.4	30.6


SRK/541/C:

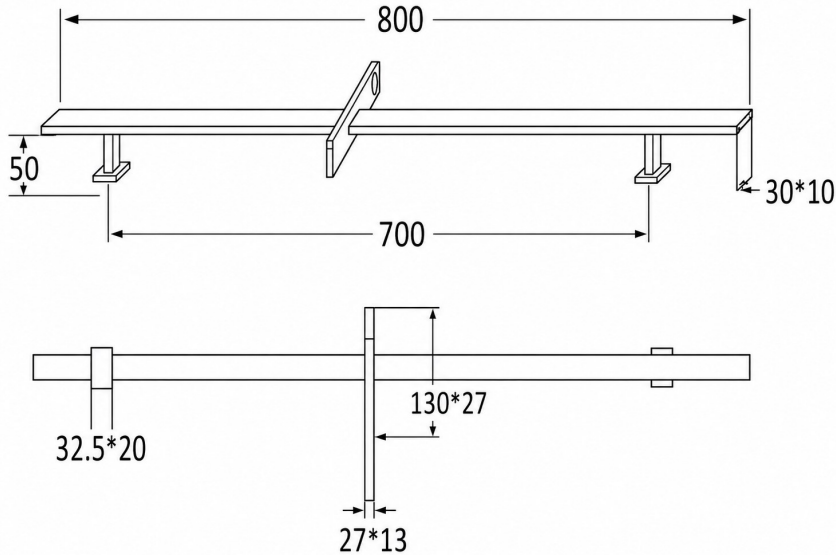


SV/577/C:

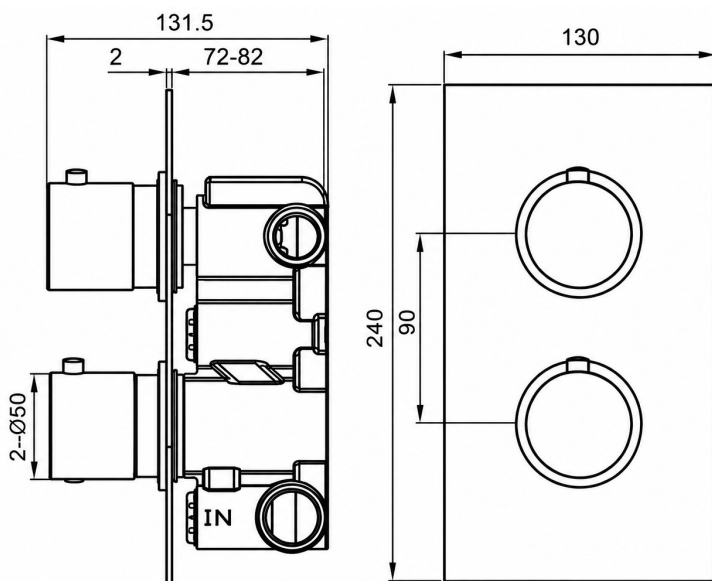

WBT/431/C:

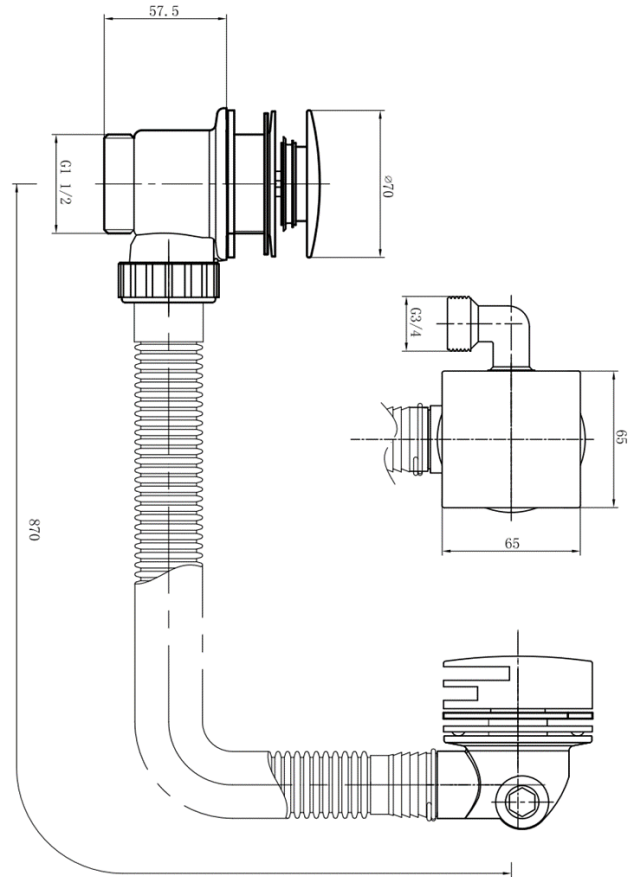

SH/521/C:

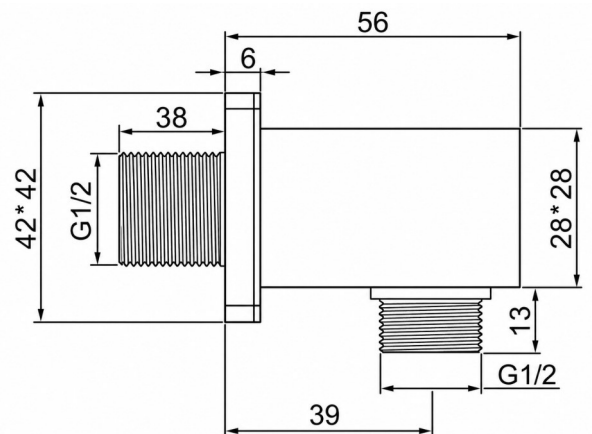

FOR FURTHER ADVICE PLEASE CONTACT :-

SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0161 6202029