TAPS & SHOWERING

Construction Brass Body (CuZn38Pb18); ABS

Handles

Finishes Chrome (Ni: 8-12um, Cr: 0.25-

0.3um)

Product Type Contemporary

Water Pressure Min. 1.0 bar, Max. 6.0 bar

Standards

Tested Between

Complies with BSEN 1111

Check valve Neoperl

Aerator Neoperl spout aerator Thermostatic cartridge Cartridge

Diverter Integrated Ceramic disc valve di-

verter

Fitting Brass G3/4" BSP deck mounted pil-

Guarantee 10 years against manufacturing

faults (excluding serviceable parts)

Additional Information

1. Temperature: Pre-set 38°C, with push button override to 48°C

2. Automatic shut off in the event of

hot or cold water supply failure


XANDA THERMOSTATIC BATH SHOWER MIXER

TBS/089/C







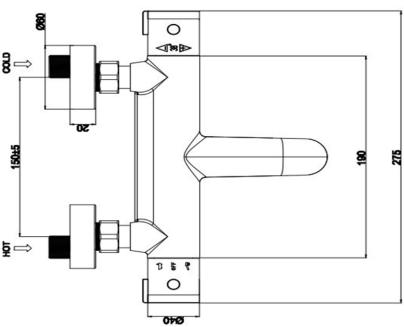

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
	6.2	7.0	-	9.6	12.6	-	17.4	22.0	-	-

