TAPS & SHOWERING

Brass Body (HPb59-1), equivalent to BS Construction

CZ122;

Brass Spout & Diverter handle; Zinc-alloy On/

off handle

Chrome plated to BS EN 248 **Finishes**

Product Type Contemporary

Water Pressure Min. 0.5 bar, Max. 6.0 bar **Tested Between**

Standards Complies with BS5412, BS EN200

Cartridge 35mm Ceramic disc cartridge

Fitting M10 x 500mm 1/2" BSP Female Flexible inlet

connection hoses supplied

Aerator M24*1 Spout aerator


Guarantee 10 years against manufacturing faults

(excluding serviceable parts)

Additional Infor-

360° Swivel Spout; Pull-out spray head

mation

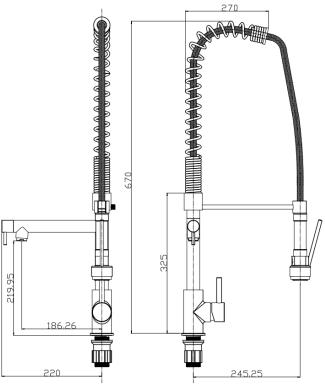

ERGO LEVER PROFES-SIONAL SINK MIXER **CHROME**

EL/281/C



The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
	-	2.1	-	5.0	8.0	9.4	11.5	13.9	-	-

