

SAGITTARIUS



TAPS & SHOWERING

| | |
|-------------------------------|--|
| Construction | Brass Body |
| Finishes | Chrome plated to BS EN 248 |
| Product Type | Contemporary |
| Water Pressure | Min. 0.2 bar, Max. 6.0 bar |
| Plumbing Systems | Suitable for all plumbing systems |
| Standards | Complies with BS5412, BS EN200 |
| Certification | Manufactured to comply with WRAS |
| Cartridge | 35mm ceramic disc cartridge |
| Fitting | M10 x 350mm ½" BSP Female Flexi Tails |
| Packaging | 35.5 x 27 x 42cm / carton (10 boxes / carton) |
| Guarantee | 10 years against manufacturing faults (excluding serviceable parts). |
| Additional Information | Supplied with G 1¼" sprung waste |

NAPLES MONO BASIN

MIXER CHROME

NA/106/C

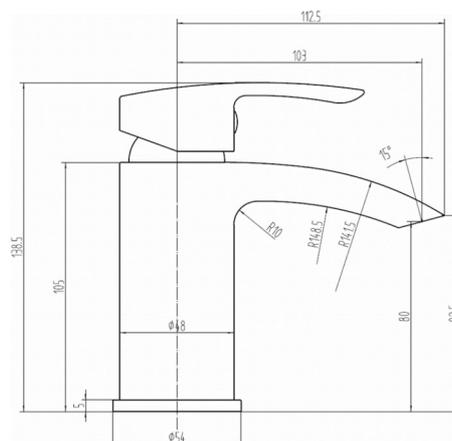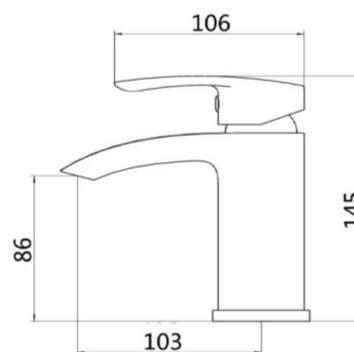

Flow Rates (Litres per minute)


| System Pressure | 0.1 Bar | 0.2 Bar | 0.3 Bar | 0.5 Bar | 1.0 Bar | 1.5 Bar | 2.0 Bar | 3.0 Bar | 4.0 Bar | 5.0 Bar |
|-----------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| NA106 | 2.8 | 4.6 | | 7.5 | 10.06 | 13.3 | 15.5 | 18.9 | - | - |

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

FOR FURTHER ADVICE PLEASE CONTACT :-

SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029

EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK

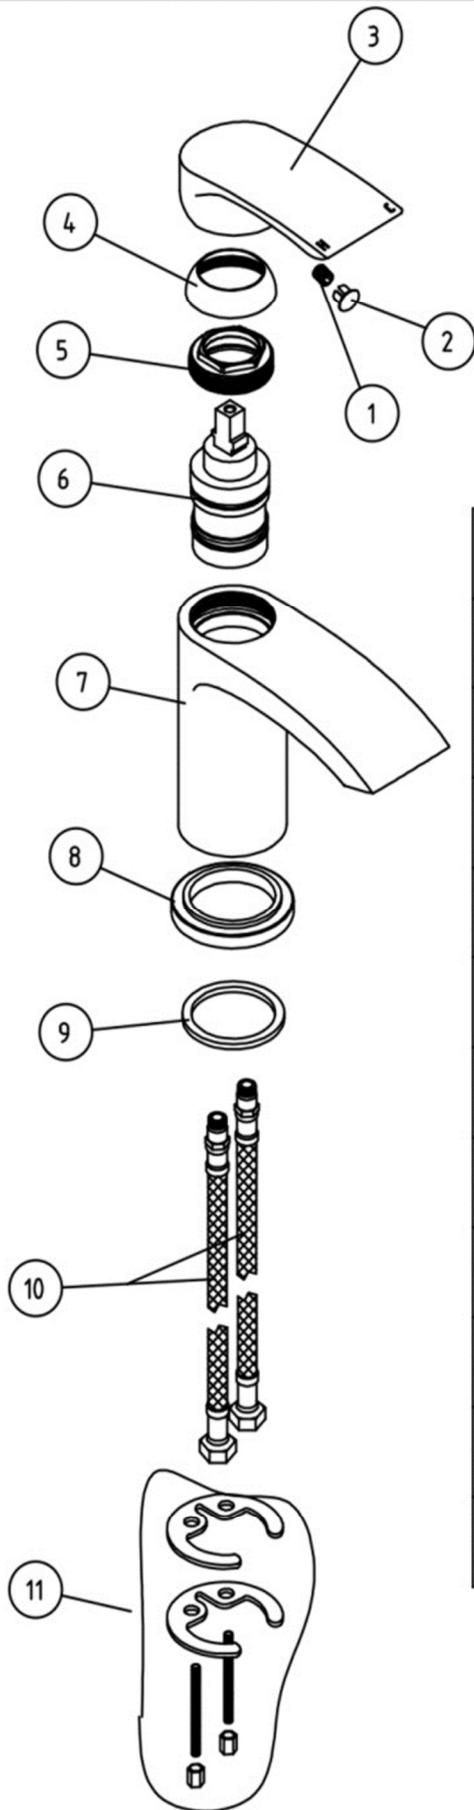

Mono Basin Mixer

| NO. | DESCRIPTION | QTY |
|-----|-----------------------|--------|
| 1 | SCREW | 1 |
| 2 | INDICE | 1 |
| 3 | HANDLE | 1 |
| 4 | PLASTIC COVER | 1 |
| 5 | CARTRIDGE NUT | 1 |
| 6 | 35 UP-SEAL CARTRIDGE | 1 |
| 7 | BODY | 1 |
| 8 | BASE PLATE | 1 |
| 9 | WASHER | 1 |
| 10 | M10*1*400 FLEXI TAILS | 1 PAIR |
| 11 | M6 FIXING KIT | 1 |

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

FOR FURTHER ADVICE PLEASE CONTACT :-
 SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029
 EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK