TAPS & SHOWERING

Brass Body (CuZn40Pb2), EN CW617N Construction

(equivalent to BS CZ122)

Zinc-alloy Handle

Chrome plated to BS EN 248 **Finishes**

Product Type Contemporary

Water Pressure Tested Between Min. 0.2 bar, Max. 5.0 bar

Standards Complies with BS6920, BS EN200

Certification

Cartridge 35mm Ceramic disc cartridge

Net Weight (Tap

only)

509g

M24*1 Spout aerator Aerator

Fitting UK: M10 x 350mm


> G1/2" BSP Female Flexi Tails EU: M10 x 350mm G3/8" BSP Female Flexi Tails

Guarantee 10 years against manufacturing faults

(excluding serviceable parts)

Additional Infor-Supplied with G11/4" sprung waste (UK on-

mation




PRESTIGE CONTRACT BASIN **MIXER CHROME** PE/106/C



The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
	1.2	3.8	-	7.1	10.4	13.0	16.8	18.1	-	-

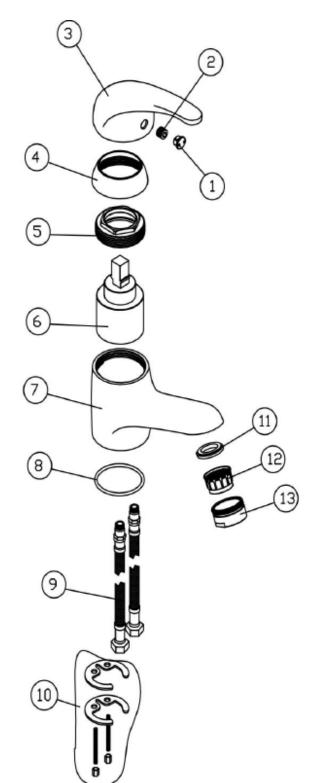

Basin Mono

No.	Code	Description	Qty
1	V05-01	Plastic Badge	1
2	V05-02	M5*6 Screw	1
3	V05-03	Handle	1
4	V05−04	Plastic Cover	1
5	V05-05	Cartridge Cover	1
6	V05-06	35mm Cartridge	1
7	V05-07	Body	1
8	V05-08	38*2.5 D-Ring	1
9	V05-09	M10*1*350 Flexible Pipe	2
10	V05-10	M6 Fixing Sets	1
11	V05-11	22.8*16*2 Rubber Washer	1
12	V05-12	Aerator	1
13	V05-13	M24*1 Nozzle	1