
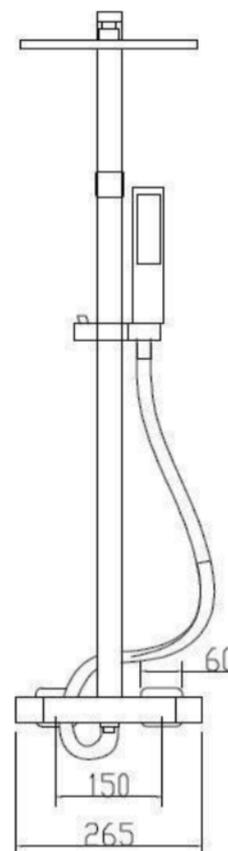


SAGITTARIUS

TAPS & SHOWERING

CURVE EXPOSED VALVE & RIGID RISER KIT CHROME SH/613/C

Construction	Brass Body (CuZn38Pb18)
Finishes	Chrome plated to BS EN 248
Product Type	Contemporary
Water Pressure	Min. 0.5 bar, Max. 6.0 bar
Plumbing Systems	Suitable for all plumbing systems, preferably balanced. Min. supply pressure differential requirement is 5:1
Standards	Complies with BSEN 1111
Certification	Manufactured to comply with WRAS, TMV2
Cartridge	Thermostatic
Fitting	Easy Fit (15mm compression connection), Brass Riser Rail
Valve	Integrate diverter ceramic valve
Check valve	0.5-10 gpm
Packaging	119x41.5x55cm/carton(4pcs), Box size: 117x39x13cm, Weight: 6.75kg
Guarantee	10 years against manufacturing faults (excluding serviceable parts).
Additional Information	<ol style="list-style-type: none"> 1. Temperature: Pre-set 38°C, with push button override to 48°C. 2. Automatic shut off in the event of hot or cold water supply failure. 3. Shower head : 250MM, SS304 ultra slim head, air induction 4. Shower handset : Chrome , single mode, ABS 5. Shower hose : PVC easy clean hose, 1.5m

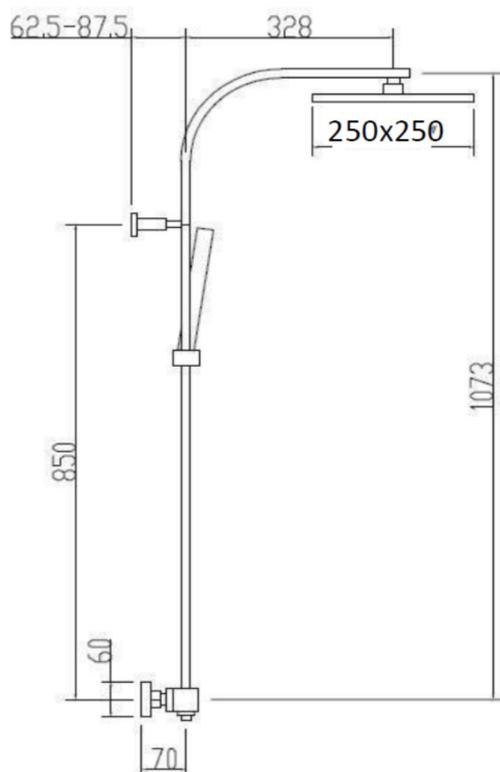

Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
SH/613/C	3.7	-	-	8.9	13.4	-	-	23.7	-	-


The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

FOR FURTHER ADVICE PLEASE CONTACT :-

SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029

EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK

EXPLODED DIAGRAM SH/613/C

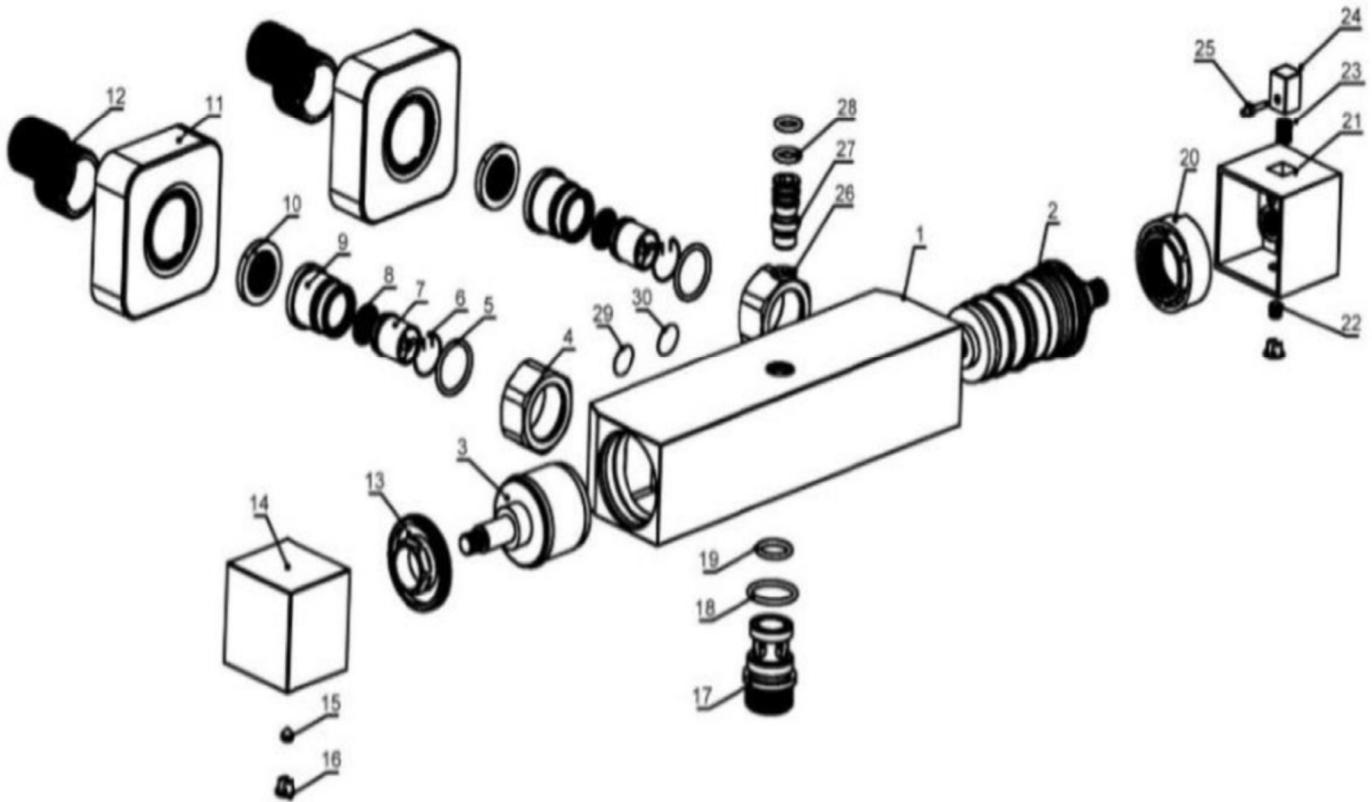

20	CARTRIDGE COLLAR	1
19	O-RING	1
18	O-RING	1
17	HOSE CONNECTOR	1
16	CAP	1
15	GRUB SCREW	1
14	ON-OFF HANDLE	1
13	BRASS NUT	1
12	OFFSET-CONNECTOR	2
11	WALL PLATE	2
10	WASHER FILTER	2
9	CHECK VALVE	2
8	NUT	2
7	FILTER	2
6	STEEL-RING	2
5	O-RING	2
4	BSP-PILLAR-NUT	2
3	FLOW-CARTRIDGE	1
2	THERMO-CARTRIDGE	1
1	BODY	1

30	COLD STICKER	1
29	HOT STICKER	1
28	O-RING	1
27	BRASS NIPPLE	1
26	O RING	1
25	LEVER	1
24	BUTTON	1
23	SPRING	1
22	GRUB SCREW	1
21	THERMO-HANDLE	1

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

FOR FURTHER ADVICE PLEASE CONTACT :-
 SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029
 EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK